

METAL BUILDING AND METAL ROOFING REPAIR ACCESSORY MINI CATALOG 2018



REPLACEMENT FASTENERS



REPLACEMENT TRANSLUCENT PANELS

METAL ROOFING & BUILDING REPLACEMENT FASTENERS

S.C.A.M.P. STAINLESS STEEL CAP HEAD REPLACEMENT FASTENER

The SCAMP is a premium quality fastener with a 5/16" Hex drive 304 stainless steel capped head ideal for replacing old worn, rusted or backing out fasteners. E.P.D.M. seal washers help to seal in a flat or angled installation. #12 is popular for the replacement of neo nails, #8 and #9 metal to wood fasteners. The #17 is popular for the replacement of #14 wood screws and #14 stitch lap fasteners. #14 SD is popular for the replacement of #8, #10 and #12 self drilling metal to metal fasteners. The new 5/16" diameter (3/8"H) self drilling fastener is used for replacing larger tapping and SD screws.





Wood Substrate	Qty/Box	Part# 250pcs/bag
#12 x 1"	2,500	DMI4SSC12100M
#12 x 1-1/2"	2,000	DMI4SSC12150M
#12 x 2"	1,500	DMI4SSC12200M
#12 x 2-1/2"	1,000	DMI4SSC12250M

Stitch Replacement Qty/Box Part# 50pcs/bag #17 x 1" ** 1,500 DMI1180225



 Metal to Metal up to 6 ga
 Qty/Box

 #14 x 1-1/4"
 1,500

 250/bag
 Part#
 DMI4SSCSD314125M

 Metal to Metal up to 6 ga
 Qty/Box

 5/16" x 1-1/4"
 1,000

 250/bag
 Part#
 DMI4SSCSD3516125M


ZAC™ TAPPER PREMIUM QUALITY REPLACEMENT FASTENER - #14 & #17

The ZAC Tapper is a premium quality fastener ideal for replacing old worn, rusted or backing out fasteners. ZAC lifetime warranty head and extra thick encapsulated E.P.D.M. seal washer help to seal in a flat or angled installation. #14 is popular for the replacement of neo nails, #9, #10 and #12 screws. #17 is popular for the replacement of #14 screws and #14 stitch lap fasteners. Metal to wood and metal to light gauge metal applications. 3/8" Hex drive on TP:A/AB, 5/16" AFH drive on SD3. All sizes available to be painted to match your panel color on request. Packaged 250 pcs/bag.



Wood Substrate Ap	plications [*]	Type A /AB
Available Sizes	Qty/Box	Part#
#14 x 1"	2,000	DMI2A4395FMF
#14 x 1-1/4" AB SO	2,000	DMI2A4428FMF
#14 x 1-1/2"	1,500	DMI2A4485FMF
#14 x 2"	1,000	DMI2A4513FMF
#14 x 2-1/2" SO	1,000	DMI2A4510FMF
#17 x 1"	1,500	DMI2A6045LFF
#17 x 1-1/2"	1,000	DMI2A8066LFF








304 STAINLESS STEEL - PREMIUM REPLACEMENT FASTENER #14

The combination of full 304 Stainless Steel with the DMG85 Silver coating and a 3/4" diameter cupped EPDM bonded washer provide the ultimate performance in a replacement fastener. The 3/8" drive HWCH cupped style head that cradles the cupped EPDM washer can be driven at multiple angles and still cover old fastener penetration holes. The #14 is popular for the replacement of neo nails, #9, #10 and #12 screws. Type A is for wood substrate applications and Type B is for metal substrate (predrill can be required for metal substrate, #8 bit). These fasteners also double as approved fasteners for our polycarbonate panel installations. Packaged 250 pcs per bag. Available in mill finish silver color only no painted fastener options.



Steel Substrate Applications (Type B)

<u>Sizes</u> Washer <u>Qty/Box</u> <u>Part#</u>

#14 x 1-1/2" 3/4" TPB 1,000 DMIREPL14150SSB
#14 x 2-1/2" 3/4" TPB 1,000 DMIREPL14250SSB



ECONOMY REPLACEMENT FASTENERS TAPPING & SD


Steel fasteners with zinc plating or VistaCoat Silver coating are available as an economical replacement fastener.
#14 WoodGrip Tapper- 5/16" HWH, bd-washer, coated, metal to wood application

1/4-14 IMPAX - 5/16" HWH #3 drill point for metal to metal applications up to 6GA #17 Tapping Screw - 1" = #14 Stitch replacement, HWH, bd-washer coated .343 Tapping Screw = T45 Torx button head Y zinc plated metal to metal, predrill required .351 Tapping Screw = 3/8" HWH Y zinc plated, metal to metal, predrill required









Tapping/MP Sizes	Qty/Box	Part#
#14 x 1"	2,500	DMI2V3321GBF
#14 x 1-1/2"	2,000	DMI2V3438GBF
#14 x 2"	1,500	DMI2V3531GBF
#14 x 2-1/2"	1,000	DMI2A3597GBF
#14 x 3"	1,000	DMI2A3626GBF
#17 x 1" MaxiS	2,500	DMI1063053
#17 x 1-1/2" BS -S	E 1,500	DMI2A6060KJ
.343 x 7/8" Torx YZ	1,000	DMI21305074
(#21) .351 x 1" A/B	2,000	DMI8A357TZ
Calf Drill Circa	Oty/Day	Dort#

Self Drill Si	zes	Qty/Box	Part#
1/4 x 1-1/4'	'SD3	2,000	DMI2S5201GBF
1/4 x 1-1/2'	'SD3	2,000	DMI2S5251GBF
1/4 x 2"	SD3	2,000	DMI2S5351GBF



FIX-A-FLASH MASTERFLASH

This flashing was designed to slide over old worn flashings without the removal of the old flashing. It is made of black EPDM rubber with an aluminum ring meant to be a fastening ring. The underside of the fastening ring has groves to hold sealant for a waterproof application.


This flashing will fit pipe diameters of 1/2" up to 15".

The base is a large 19-1/2" x 19-1/2" to completely cover old pipe flashing bases.

This part is also a great solution for smaller pipes with an oversized hole in your metal panel. Although it is not common, there are occasions where a metal installer cuts too large of clearance hole in the metal panel to accommodate a pipe penetration. If this hole is larger than the base diameter of a standard flashing sized for the pipe it will not waterproof the installation. The large base of the Fix-A-Flash will accommodate most overcut hole diameters yet flash pipes of small diameters.

E.P.D.M. Black 20yr warranty rubber and adaptable base. Buy American Plan.


Part# FF851BC 5 pcs per box



DEK-STRIP™ EXPANDABLE EDGED **FLASHING**

STRETCHES TO ANY SHAPE, SEALS, & STAYS Wraps around almost any profile, paintable after installation, great for large, round pipes. Serpentine edges stretch up to 25% for added length. Handles vibration and expansion, TPE has a continuous service temperature range of -58°F to +240°F. Imported. APPLICATIONS INCLUDE:





Large square and round ducts, chimneys, gutter detail, parapet flashings, skylights, expansion joints, stepped roof, dissimilar roof profiles, transition wall, gambrel roof and flash between dissimilar materials.

AVAILABLE SIZES

PN# DMDS775G 7"x75' 9"x75' PN# DMDS975G 12"x75' PN# DMDS1275G,

DIRECT*SEAL LONG LIFE UNIVERSAL CLOSURE ROLLS

Universal closure rolls designed to seal gaps in metal roofing, window and door installations. When compressed, Direct*Seal will become a water, pest, wind, and dust barrier in valley, hip and other panel to panel or panel to trim applications. Direct*Seal can also be used to close in gaps around windows and doors to help increase the energy efficiency of your building. Direct*Seal comes fully expanded in a single wrapped roll and is compressed at time of application.

Application Guide: Compression of the product is required to achieve the following: 25% Compression required for dust & sound protection, pest resistance and thermal insulation. 50% Compression required for wind, air and rain protection up to 20 psf.

Advantages:

- UV protected foam with no asphalt content (non-streaking, non-staining)
- Designed for any pitch from 2/12 to 20/12
- Will not scratch panel finishes
- Easy to apply with a full width peel back adhesive strip



Available Sizes Qty/Box DDS101020 1" x 1" x 20' 1-1/2" x 1-1/2" X 20' 10 DDS151520 2" x 2" x 10' 10 DDS202010 Color: Gray

#43 RIVETS

Blind rivets fasten joints without access to the reverse side of the sheet metal. DMI #43 painted stainless steel rivets are manufactured of corrosion resistant 302 / 304 stainless steel. DMI SS rivets exceed the corrosion resistant standards put forth in Florida Building Code section 1506.6. DMI also offers un-painted #43 rivets in 304 stainless steel, 316 stainless steel and copper/brass. Rivet length is measured to the end of the rivet body. A #43 rivet has a 1/8" diameter body with a 5/16" body length. Its grip range is material





Standard Colors SS Rivet for 100 Piece Per Bag Packaging: :

Almond 330, Black 507, Bright White 014, Colonial Red 074, Dark Bronze 324, Evergreen 232, Mansard Brown 1111, Medium Bronze 537, Mill Finish, Pearl Gray 302, Sand Beige 109, Slate Gray 091.

REPAIR & REPLACEMENT SEALANTS

7108 PERMATHANE™ PREMIUM POLYURETHANE Exterior Construction Sealant

Permathane® SM7108 is a one component, gun-grade, non-sag, moisture-cure polyurethane sealant. This high performance product is designed with outstanding UV resistance and long term durability with a proven record in tough climates around the world. Permathane is the choice of true professional installers. 7108 Permathane is an excellent repair sealant due to its moisture cure properties. Permathane can be installed underwater or in damp areas and achieve 95% of its full bonding capability. Ideal for mill finish and painted metal roofing panels, window installation, gutter installation and repair and much more. Premium antifungal agents and bonding capabilities.

30 (10.1oz) tubes/cartridges per carton. 30 (10.1oz) tubes/cartridges per carton.

Color:White Part # DMISM7108W Color:Gray Part # DMISM7108G



Synthetic Butyl Backed Flashing Membrane Roll

PF19 is an extremely aggressive, self-adhering flashing membrane designed to protect windows and doors from moisture penetration. When properly integrated into the wall systems, PF19 will defend against water penetration into the building envelope. PF19 will also perform in many roofing applications such as seam sealing at hip and ridge areas. Not approved or designed for use with polycarbonate panels or materials. Not for exposed applications longer than 30 days.

- Excellent adhesion to OSB, plywood, aluminum, vinyl, weather resistive barriers and underlayment.
- UV resistant up to 6months.
- Meets AAMA 711-07, Self Seals around nails and screws.
- Double split back release paper for easy install.
- Made in the U.S.A.



Now with your choice of facing:
White woven vinyl facer or
silver Metallized facer with Scrim.

Facer / Size
White 6" x 75' 8
Silver 6" x 75' 8

<u>Qty/Box</u> <u>Part#</u> DMI8Q18W675W DMI8Q18W675S

ButyI*Roll PREMIUM BUTYL TAPE SEALANT ROLL

Designed for sealing and preventing the entry of moisture, air and dust into metal lap joints, Butyl*Roll has expanded to serve a wide range of applications. Unlike tube sealants, Butyl*Roll provides a consistent shaped bead, and is quick and easy to apply. Meets or exceeds the following specifications: MIL-C-18959B TIICB, TT-C-1996A TIICB, AAMA 904.3-92 and AAMA 807.3-92 and is Made in the U.S.A.

ADVANTAGES:

A premium quality sealant roll made of 100% solids, highly rubbery, sticky and easy to apply. It shows excellent performance over a wide range of temperatures and conditions. Excellent adhesion to Galvalume and Kynar 500, non-staining and permanently flexible. Butyl*Roll is mold and mildew resistant. Unlike many of the competitors Butyl*Roll is **Approved for use on Polycarbonate Panels.**



Standard stock sizes include

<u>Size</u>	Qty/Box	Part#	
Single bead styles			
3/32 x 3/8" x 45 ²	40	DMBT3323845	
3/32 x 1/2" x 45'	32	DMBT3321245	
3/32 x 3/4" x 45'	24	DMBT3323445	
3/32 x 1" x 45'	20	DMBT332145	
Double bead styles	;		
3/16 x 7/8" x 40'	10	DMBT31678D	
Triple bead styles			
3/16 x 7/8" x 25'	14	DMBT31678M	
3/16 x 2-1/2" x 20'	6	DMBT3162122	



Corrugated Polycarbonate Translucent Panels

Polycarbonate panels allow architects and building owners to take advantage of one of Mother Natures best free resources, daylight. Polycarbonate panels are strong and durable, with up to 200 times the strength of traditional glass. DMI offers Polycarbonate Translucent Panels designed to complement popular corrugated roofing panel profiles. Our panels are co-extruded with UV protection and offer a 10 year warranty against loss of light transmission due to yellowing plus a 10 year warranty against breakage due to hail.

Applications include:

Metal building sidelights and skylights in new building construction. Replacement panels for deteriorated fiberglass panels in metal buildings. Canopies and patio coverings in pool areas and screen cage applications. Commercial Greenhouses, Home Greenhouses, Office Partitions, Vertical Glazing, Industrial Roofing, Pool Enclosures, Patio Covering, Window Replacement, Metal Buildings, Skylights, Domes, Shelters, Canopies, Sheds, Carports, Sunrooms, Sidelites.

Thicker is better:

DMI offers Econo Sunsky 0.8mm, Commercial 1.0mm,1.5mm Mega and new for 2018 2.0mm DMI XHD extra heavy duty commercial grade panels.

Standard **1.0mm** thick panels are up to 25% thicker than competing 0.8mm polycarbonate sheets. This extra thickness translates directly into extra strength allowing the R panel (MR12) profile to pass Florida Building Code and TDI testing.

For the customers who want to invest in the strongest profiled panel we offer the **Mega 1.5mm** panel. It is up to 93% thicker than the competitors 0.8mm thick panels and offers higher wind load and snow loading capabilities.

New for 2018 is the ultimate in strength the NEW DMI XHD Polycarbonate panel is available in **XHD 2.0mm** thickness in a reflective solar silver to fit the popular R Panel profile. The DMI XHD panel offers the added benefit of less heat gain thanks to a special reflective color.

Tested and approved:

MR12 1.0mm Commercial grade and 1.5mm Mega panels have been tested and approved for use as roofing and side wall panels in Florida and have a TDI approval.

Panel	Purlin Spacing	FBC Approval #	Test/wind load pressures from FBC Testing
1.0mm MR12	5' Centers	FL11238.1	-27.5 psf / +35 psf
1.5mm MR12	5' Centers	FL11238.2	-45.0 psf / +50 psf

UV protected:

What is special about the product Direct Metals, Inc. offers?

They are Made in the U.S.A. and have co-extruded UV protection that provides protection throughout the panel. This process is different than some competitors products that use a spray on top coating that can be diminished by weathering.

10/10 Warranty:

10 Year light transmission and 10 year hail limited commercial warranty is available to the original purchaser. The warranty warrants that the product shall not lose more than 10% of its light transmitting capacity for a period of 10 years. The hail breakage warranty warrants the product shall not break due to excessive loss of impact strength as a direct and exclusive result of impact of hail. Warranty must be registered at warranty@directmetalsinc.com

Flexibility:

DMI distributors have the flexibility to offer many choices in daylighting options including; profiled and flat (non-profiled) translucent polycarbonate and PVC panels. Custom panel profile matching technology is available to your customers where DMI can create a custom translucent panel using a qualifying CAD drawing (minimum orders apply).

Accessories:

Fasteners, sealants, closures and ridge caps are available to complement many applications. These specific fasteners & accessories have been tested for compatibility and are required to keep panel warranty intact. (see page29)









CORRUGATED TRANSLUCENT REPLACEMENT PANELS

In stock and ready to ship:

DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels. We have the flexibility to offer custom panel length and profiles by special order. Below you will find our quick ship panel options that are ready to ship from a DMI Service Center.

Popular applications include:

Metal Building sidelights and skylights in new building construction. Replacement panels for deteriorated fiberglass panels in metal buildings. Canopies and patio coverings in pool areas and screen cage applications. Commercial Greenhouses, Home Greenhouses, Office Partitions, Vertical Glazing, Industrial Roofing, Pool Enclosures, Patio Covering, Window Replacement, Metal Buildings, Skylights, Domes, Shelters, Canopies, Sheds, Carports, Sunrooms, Sidelites.

Quick Ship American Made Polycarbonate Panels

ECONO	0.8mm

COMMERCIAL 1.0mm

MEGA HD 1.5mm

DMI offers 3 standard grades/thicknesses. Thicker is better and we offer a 25% or 93% upgrade to the 0.8mm competition.

MR9


Panel	Purlin Spacing	FBC Approval #	Test/wind load pressures from FBC Testing
1.0mm MR12	5' Centers	FL11238.1	-27.5 psf / +35 psf
1.5mm MR12	5' Centers	FL11238.2	-45.0 psf / +50 psf

1.0mm Commercial Grade

Quick SI				arbonate Panels	Expected +/- 5%
Profile	Color	Length	WHSE	Part#	Light
Transmi	ssion				FBC#
MR9	Clear	12'	1,2	DMP341MSCL12	90%
MR9	White	12'	1,2	DMP341MSWT12	45%
MR12	Clear	12'	1,2	DMPR1MSCL12	90% FL11238.1
MR12	White	12'	1,2	DMPR1MSWT12	45% FL11238.1
MR12	Bronze	12'	1,7	DMPR1MSGR12	35% FL11238.1
5V	White	12'	1	DMP51M5VWT12	45%
2.67 SP	Clear	12'	1,7	DMP10925312C	90%
2.67 SP	White	12'	1,7	DMP10924912W	90%
7.2 MR	Clear	12'	7	DMP72MR12C	90% Special Order
7.2 MR	White	12'	7	DMP72MR12W	45% Special Order
7270	Clear	12'	1	DMIPC727012C	90% Special Order

1.5mm MEGA HD Commercial Grade

		erican Ma	ade Polyc	arbonate Panels	Ex-	
pected		Lameth	WHICE	Double	Limbs	FBC#
Profile Transm		Lengin	WHSE	Part#_	<u>Light</u>	
MR9	Clear	12'	2	DMPCMR9MC12	90%	
MR9	White	12'	2	DMPCMR9MW12	45%	
MR12	Clear	12'	1	DMPCMR12MC12	90% F	L11238.2
MR12	White	12'	1,2	DMPCMR12MW12		L11238.2
BR2 S	oft White	12'	1	DMPRBR215SW1	2 80%	



MR12	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight
FBC,TDI	38"	36"	12"	1.25"
1-1/4"	~~~	36" coverage width —	12"	7
•		38" overall width		•
BR2	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight
BR2				


	Width		On Center	RHeight
	38"	36"	9"	.75"
34-	~~~	— 38" overalt width ——	\tag{\tag{\tag{\tag{\tag{\tag{\tag{	


Net Coverage

Depth /

5V	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight
	26"	24"	12"	0.5"
24" Coverage				

	12"			
2.67 SP	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight
	34.25"	32"	2.67"	7/8"





Important things to know about translucent panels. 1. All sales final - no returns 2. Special fasteners and accessories are required for approved installation and warranty. 3. You must register your warranty with DMI. 4. Shipping charges and packaging charges may be additional. 5. Custom panel profiles and custom lengths are available apon request, expect order minimums and required deposits. 6. All fastening points must be pre-drilled and only approved sealants can contact these panels. 7. When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.

Polycarbonate Panel Accessories



TRANSLUCENT POLYCARBONATE RIDGE CAP


Polycarbonate ridge cap is installed on the ridge or peak of building roofs in place of a standard metal ridge cap trim. Polycarbonate panels allow architects and building owners to take advantage of one of Mother Natures best free resources, daylight. DMI distributors offer polycarbonate translucent ridge caps in two thicknesses to complement popular corrugated metal or polycarbonate roofing panel profiles. All caps come 10'6" x 23.5" wide with a top hat profile.

DMI 1.0 mm Translucent Polycarbonate Ride Cap

Standard 1.0mm PC ridge cap is available in clear or opal white, bronze by special order.

DMI 2.0mm MEGA Translucent Polycarbonate Ridge Cap ** New **

The stronger big brother to our standard cap offerings. It is twice as thick as our standard allowing this cap to span ridge openings without the extra use of a centerline brace. Available in clear only and ships from our Midwest Service Center.





POLYCARBONATE PANEL TO WOOD STAINLESS STEEL SCREW

Full 304 Stainless Steel protection with the added protection of DMG85 coating. Special 3/4" diameter cupped style washer for standard applications to wood substrates. Designed to meet DMI and Sunsky installation guidelines. Pre-drill of polycarbonate panel required.

	Available S	<u>Sizes</u>	Qty/Box	Part#	
	14 x 3/4"	TPA 3/4C	1,000 DMI	REPL14034SSA	
	14 x 1-1/2"	TPA 3/4C	1,000 DMI	REPL14150SSA	
	14 x 2-1/2"	TPA 3/4C	1,000 DMI	REPL14250SSA	
250 PIECES PER BAG					



POLYCARBONATE PANEL TO STEEL STAINLESS STEEL SCREW

Full 304 Stainless Steel protection with the added protection of DMG85 coating for resistance to dissimilar metal reactions in aluminum substrates. Special 3/4" diameter cupped style washer for standard applications to steel substrates. Pre-drill substrate and panel.


Available Sizes Qty/Box Part#
14 x 1-1/2" TPB 3/4C 1,000 DMIREPL14150SSB
14 x 2-1/2" TPB 3/4C 1,000 DMIREPL14250SSB
250 PIECES PER BAG



POLYCARBONATE PANEL TO STEEL FBC FASTENER

Oversized #14 fasteners with an oversized stainless steel / EPDM bonded 1.125" diameter washer. This fastener is for installation of polycarbonate panels to light to medium gauge metal substrate up to 8 ga steel to meet Florida Building Code Approval installation guidelines. Pre-drill of polycarbonate panel required.

<u>Available Sizes</u> <u>Qty/Box Part#</u> 1/4-14 x 1-1/2" SD3 <u>Qty/Box Part#</u> 1000 DMIPOSD14150W114



Available painted



POLYCARBONATE PANEL TO PC PANEL OR STEEL PANEL TO PC PANEL OVERLAP FASTENER - SS GROMMET SEAL

Stainless Steel 304 with EPDM grommet. Used for panel overlaps of polycarbonate and fiberglass panels. Hex head machine screw with rubber grommet that seals around top and bottom of panel penetrations. Predrill required for installation.

 Sizes 1/4" x 1"
 Qty/Box 2500
 Part# DMI210F100NWESN

 3/8" X 7/8" Each
 DMI23810PG



BUTYL*ROLL BUTYL TAPE SEALANT FOR PANEL SEALING

Available in various sizes supplied in ready-to-use rolls. For sealing gaps between polycarbonate panels and uneven metal panels around perimeter of skylights. Approved by DMI and Palram for use on MEGA, SUNSKY & SUNTUF panels.

Available Sizes	Qty/Box	Part#
3/16 x 7/8" x 25' MTB	14	DMBT31678M
3/32 x 3/8" x 45' SB	40	DMBT3323845
3/32 x 1" x 45' SB	20	DMBT332145
3/16 x 2-1/2" x 20' TB	6	DMBT3162122



POLY-GLAZE™ PLUS CLEAR SILICONE SEALANT

SM5731 Poly-Glaze™ Plus Silicone is a one component, medium modulus, non-corrosive, neutral cure translucent silicone sealant. Primarily used to seal poly to poly and poly to steel panel joints. It has been tested and approved by DMI and Palram for use on MEGA, SUNSKY & SUNTUF panels.

Available Sizes	Qty/Box	Part#
10.1oz tube	30	DMSM5731C
Translucent		



DRILL BITS SIZED FOR POLYCARBONATE INSTALLATION

These two drill bits are required for proper installation of the above fasteners. A 3/8" diameter drill bit to create the proper clearance hole for our commercial grade polycarbonate sheets. The 7/32" bit is used for predrill of #14 SS type B SS fasteners into steel purlins.

Available Sizes	Part#
7/32" x 2.5" Metal bit	DMI9SWSN7/3
3/8" x 4" Poly bit	DMI9DB384



Fall Protection Screen

Florida Building Code approved Fallguard Skylight Safety Screen kit. 3'9" x 11'4" with hat channel support. Provides passive protection and is easy to install. Outside plastic ring and hat channel are included for a safe and clean installation

Model	Qty/Box	Part#
Model F-310	1	FG F310





DIRECT METALS, INC. offers many of our fasteners painted to complement metal panel colors. We have three painting and coating systems. DMG85 full coating system, VistaCoat Premium paint system or PowderCoated head paint finishes are available on most of our metal roofing and metal building fasteners.

DMG85



DMI fasteners with the DMG85 coating system have been tested to surpass testing requirements set forth in the various building codes in the Southeast. This includes resistance to salt spray and acid rain conditions. This multilayer full coating is available in most of the colors below on the WoodZIP line of fasteners. All DMI Miami–Dade listed fasteners have DMG85.

VistaCoat



VistaCoat fasteners are available with a full coat paint system. VistaCoat was developed to provide corrosion resistance above and beyond the industry 1000 hr salt spray standard (B117) on the whole fastener including the washer guard. Vista coat has built in UV resistance to combat paint fading and provides paint fade performance consistent with the top panel finishes in the industry. Vista coat is available on Woodgrip, Woodgrip XG, WoodZac, WoodMac and Impax self drilling fasteners in the standard colors below.

PowderCoat



Direct Metals, Inc. also offers powder coated head paint systems on many of the Direct*Seal ST M-bit, ZXL and #12 SCAMP fasteners. Powder coated fasteners have excellent corrosion protection on the head and washer. Powder coating does not coat the whole fastener so galvanized and zinc platings are used to provide corrosion resistance on the shank and point portions of these fasteners. Powder coated fastener colors may vary slightly from the color chart below, minimums may apply.

Rivets



Direct Metals, Inc. now offers 302/304 stainless steel #43 rivets in the standard colors noted below with a "R" in 250 count bag packaging. Additional colors in 100/bag packaging are designated with an "R100". These will be the only standard stock colors available in stainless steel rivets.

The color chart to the right is representative of our standard color offerings. Colors may vary from actual product due to color variations in the catalog printing process. Actual colored product samples are available on request.



Getting to know DMI policies:

Shipping Policy:

Response Times and Same Day Shipping Cutoff Time:

DMI Florida, DMI Indiana, DMI Georgia service centers cutoff for same day shipping on in-stock products is 1:00 PM EST for LTL pallet shipments and 3:00 PM EST for UPS parcel service shipments.

Pennsylvania, New York, Illinois, California and Iowa service centers and partner warehouses order cutoff for same day shipping of in-stock items is **11:00 AM EST**. Painted items allow 3-7 days to ship.

The above shipping times apply to in-stock finished material at time of order. Materials that have to be painted, washered, packaged or manufactured will take additional lead time.

Freight Policy:

DMI freight terms are F.O.B. / freight charges will be additional. Some prepaid freight incentives are available on specific products shipping from the same service center on the same date. Please consult your DMI Distributor agreement and quotation for specifics on available prepaid freight incentives.

Return Policy:

All DMI distributors have the right to set their own policies with their customers including but not limited to: return, re-stock, pricing and terms of sale.

DMI policy to our distributors is that all sales are considered final (ALL SALES FINAL). If DMI management will accept a return, it must be a standard stock product returned in original un-opened packaging, with a non-negotiable restocking fee. Any painted or special order product sales are final, no returns. Prior approval from Direct Metals, Inc management is required for any and all returns. No returns on sales older than 45 days, regardless of circumstance. No returns on items longer than 6' in length including polycarbonate and PVC panels. Re-stocking fee is 25% of the invoice amount, in addition to all shipping costs to send original shipment and return product to a Direct Metals, Inc service center. All credits for qualifying returns will be given in the form of an account credit against new purchases. No cash refunds available.

2018 Sales Policies and Conditions:

Direct Metals, Inc. sells materials directly to our registered distributor network. We do not offer direct sales or new accounts to homeowners, contractors or installers; however we can assist you in finding the right product and your closest distributor.

If your company would like to apply to become a new registered DMI distributor, here are guidelines to see if you may qualify to join our distributor network.

Registered dealers must maintain a minimum stock of DMI products.

Registered dealers must purchase an average minimum of \$ 5,000.00 / month.

Registered dealers must offer products for resale and not intercompany use.

Registered dealers must maintain and provide a copy of a Tax exempt resellers license.

Registered dealers must have a strong financial background and be able to have credit approved by DMI.

Dealer applicants should be a minimum of 25 miles from any existing DMI dealer.

If your company does not meet all of the above criteria, DMI can assist you in creating a strong relationship with one of our very competitive distributors.

Information Policy:

DMI works to maintain to the best of our abilities correct and current information in our catalogs and on our websites. However data and information on our products and services can quickly become out of date without prior warning. Part numbers and box labels may change or vary from this catalog or DMI websites. The information presented is from sources believed to be reliable but no warranty (expressed or implied) is made regarding accuracy, adequacy, completeness, legality, reliability or usefulness of any of the information contained within this catalog or DMI websites.


Employment Policy:

The Equal Employment Opportunity Policy of DMI is to provide a fair and equal employment opportunity for all associates and job applicants regardless of race, color, religion, national origin, gender, sexual orientation, age, marital status or disability. DMI hires and promotes individuals solely on the basis of their qualifications for the job to be filled. DMI maintains a company handbook with internal policies of conduct and benefits. To inquire about employment opportunities with DMI, please email a resume to hr@directmetalsinc.com.



Distributor order entry or product inquires:
Toll Free Phone: 855-800-8878
Toll Free Fax: 855-800-8877
orders@directmetalsinc.com
Website: www.directmetalsinc.com

We are proud to have over 1300 distributors across the United States of America. These distributors are serviced through our warehousing locations strategically placed to offer fast service and low shipping cost on our quality products.

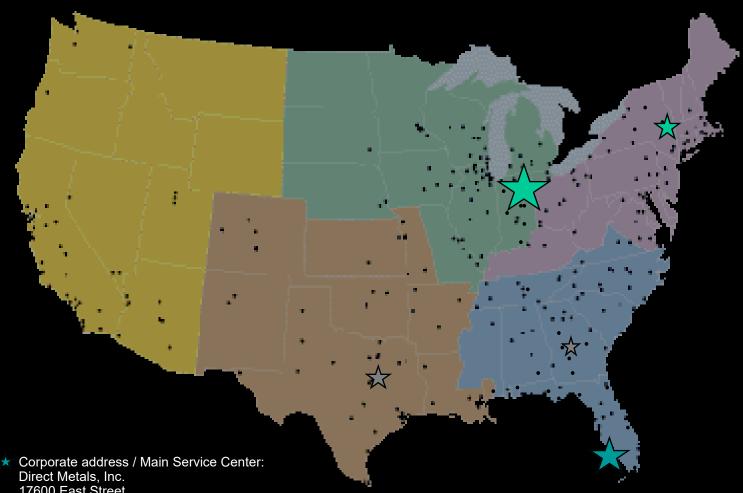

17600 East Street
N. Ft Myers, FL 33917
Phone: 239-599-8527
Fax: 239-599-8545

Manager Email: andrew@directmetalsinc.com
Order tracking : tracking@directmetalsinc.com
Order entry : orders@directmetalsinc.com

★ Midwest Service Center: Direct Metals of Indiana 1800 Jim Neu Drive, Suite 3 Plymouth, IN 46563 Phone: 574-935-3644 Fax: 574-935-3643

> Order tracking : tracking@directmetalsinc.com Order entry : orders@directmetalsinc.com

Future Service Center Coming Soon

Your Direct Metals, Inc. distributor is:

www.directmetalsinc.com