


17600 EAST STREET, N. FT MYERS, FL 33917

855-800-8878 Florida, Indiana, Georgia,

www.directmetalsinc.com

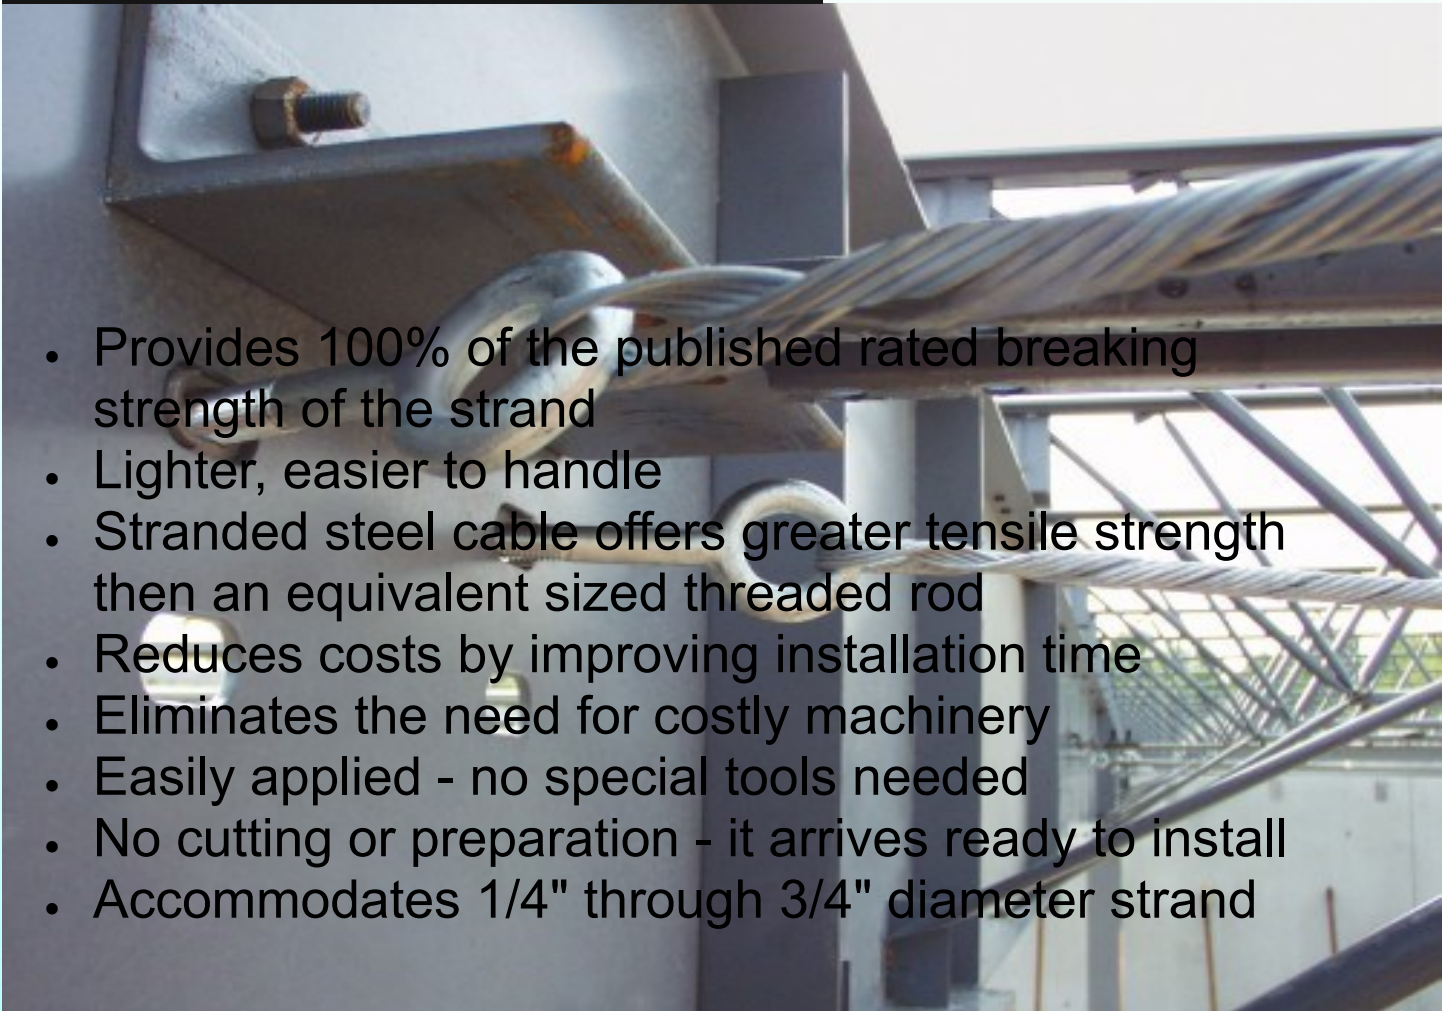

- Provides 100% of the published rated breaking strength of the strand
- Lighter, easier to handle
- Stranded steel cable offers greater tensile strength than an equivalent sized threaded rod
- Reduces costs by improving installation time
- Eliminates the need for costly machinery
- Easily applied - no special tools needed
- No cutting or preparation - it arrives ready to install
- Accommodates 1/4" through 3/4" diameter strand

| BRACE-GRIP Dead-end Catalog Numbers | Strand Size In. (mm) | Brace-Eye Catalog Number | Recommended Eye Bolt Size In. (mm) | Rated Breaking Strength (lbs.) of EHS Strand |
|--|----------------------------|--------------------------------|--|--|
| BRG-2580 | 1/4" (6.3 mm) | 00060110 | 1/2" (12.7 mm) | 6,650 |
| BRG-2582 | 5/16" (7.9 mm) | 00060110 | 5/8" (15.8 mm) | 11,200 |
| BRG-2583 | 3/8" (9.5 mm) | 00060110 | 3/4" (19.0 mm) | 15,400 |
| BRG-2584 | 7/16" (11.1 mm) | 00060112 | 3/4" (19.0 mm) | 20,800 |
| BRG-2585 | 1/2" (12.7 mm) | 00060112 | 7/8" (22.2 mm) | 26,900 |
| BRG-2586 | 9/16" (14.2 mm) | N/A | 1" (25.4 mm) | 35,000 |
| BRG-1587 | 5/8" (15.8 mm) | N/A | 1-1/4" (31.7 mm) | 42,400 |
| BRG-4588 | 3/4" (19.0 mm) | N/A | 1-1/4" (31.7 mm) | 58,300 |