

Metal Roof Vent Sealer Adapter Master Flash®

Specifically designed for Metal Roofing Industry




Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent	+135°C (+275°F)
	Continuous	+100°C (+212°F)
Low Temperature Resistance tested to...		-55°C (-67°F)
Compression Set Maximum...		25%

*Complete specification data and testing methods are available upon request.

PATENT PENDING



- **Weather Protection**
Made of E.P.D.M. or Silicone,
 These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.
- **Adaptable Base**
 The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.
- **Black, Light Grey & Dark Grey EPDM**
Opening: 11-3/4" X 11-3/4"
Square Base: 24"

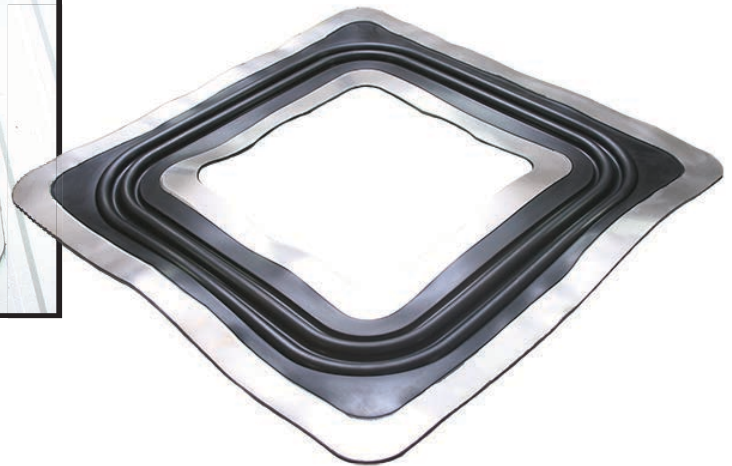

5 Easy Steps

