


# Direct\*Seal ZXL w/M-Bit

Designed as a long life metal roofing and sidewall panel fastener for installation into wood substrates.

## Features:

- The Micro-Bit drill point reduces metal pig-tails/shavings that can be embedded into the washer
- 5/16" cupped style ZAMAC head that encapsulates the seal washer
- Lifetime warranty and protection against red rest on the head
- Quality Powdercoat paint available to match metal panel colors.

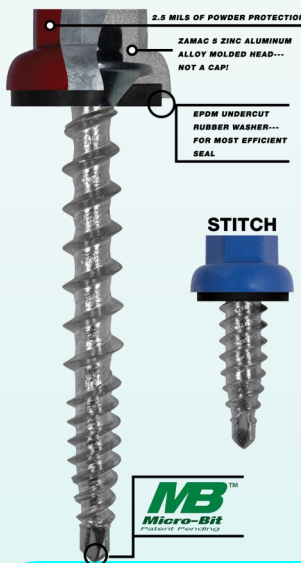

## Specifications

Typical Specifications #10 SD1  
5/16" AFH Hex Drive, MTW  
Pull out SYP Wood 1" penetration  
S. Yellow Pine 713 lbs ult  
Pull out 1/2" PLY 368 lbs ult  
Pull out 7/16" OSB(NOM1/2) 210 lbs

## Selection

Available Sizes	Qty/Box	Part#	Weight/1000
#10 x 1"	3,000	DMI3ZXL10100	12.7 lbs
#10 x 1-1/2"	2,500	DMI3ZXL10150	14.7 lbs
#10 x 2"	2,000	DMI3ZXL10200	17.0 lbs
#10 x 2-1/2"	1,500	DMI3ZXL10250	19.2 lbs
#10 x 3"	1,000	DMI3ZXL10300	21 lbs
#12 x 3/4" Stitch	2,500	DMI3ZXL12075	11 lbs

## Installation

5/16" hex driver required, DMI LSC 5/16" suggested.  
0-2500 rpm electric screw gun with depth sensing nose piece or torque control device.  
Suggested drill speed into most substrates is 1800 rpm.  
Do not overdrive or under drive, not suggested for use with impact driver installation tools.  
Suggested 1" minimum penetration into substrate.  
Approximated values are average ultimate values.  
Values may change with strength and condition of substrate wood.

**Limitations:** Not recommended for aluminum or copper roofing panels.  
Not recommended for installation by impact drivers. Contact DMI for MSDS information



To find a distributor call 855-800-8878 or visit [www.directmetalsinc.com](http://www.directmetalsinc.com)