

#12-13 DEKFAST™ FASTENER (PH3)

Ideal for insulation attachment to wood and light gauge steel. SD#1 point cuts through gravel, BUR and metal up to 18ga. Black Sentri XP long-life coating for extended corrosion protection. The #3PH pan head is compatible with all Dekfast insulation stress and membrane seam plates. Packaged in sealed plastic jobsite pails with one PH3 bit tip per pail. **FM & Dade County Approved**



Available Sizes	Qty/Pail	Part#
#12 x 1-5/8"	1,000	DMI2A8513995B
#12 x 2-1/4"	1,000	DMI2A8518995B
#12 x 2-7/8"	1,000	DMI2A8523995B
#12 x 3-1/4"	1,000	DMI2A8526995B
#12 x 3-3/4"	1,000	DMI2A8530995B
#12 x 4-1/2"	1,000	DMI2A8536995B
#12 x 5"	1,000	DMI2A8540995B
#12 x 6"	1,000	DMI2A8548995B
#12 x 7"	500	DMI2A8556995B
#12 x 8"	500	DMI2A8564995B

DEKPACK 100 Pack All Purpose Screws



The same DEKFAST all purpose fasteners as above packaged in convenient 100 pack boxes. Ideal for stocking your shelves for repair or fill in jobs.

Packaged with one PH3 bit tip per box.


#12 DEKPACK SCREWS

Sizes	/Box	/Case	Part#
1-5/8"	100	9	DP158
2-1/4"	100	9	DP214
2-7/8"	100	9	DP278
3-1/4"	100	9	DP314
3-3/4"	100	9	DP334
4-1/2"	100	9	DP412
5"	100	9	DP500

DEKPACK Plates

Sizes	/Box	/Case	Part#
3" Ins	100	9	DPP3
2 3/8" Mem	50	9	DPP234

Strength	Pull out Steel	Pull out Wood	Size PH3
Tensile:2410	22GA:513	2X : 1" 462	HeadH .118
Torsion:78 inlbs	20GA:695	3/4"PLY:575	HeadD .448
Shear: 1815	18GA:787		Thread:.222

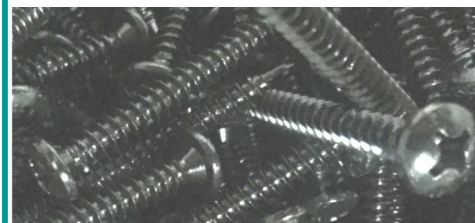

#14-10 DEKFAST™ HD FASTENER

Ideal for insulation or membrane attachment to wood, concrete and light gauge steel. This HD fastener has a #3 Phillips MTW low profile head with strength shoulder and a SD#1 point that cuts through gravel, BUR and metal up to 18 gauge.

#3PH MTH is compatible with all Dekfast insulation stress and membrane seam plates. Coated with Black Sentri XP long-life coating for extended corrosion protection. Packaged in sealed plastic jobsite pails with one PH3 bit tip per pail. **FM & Dade County Approved**



Available Sizes	Qty/Box	Part#
#14 x 1-1/4" PH#3	1,000	DMI2A7210995B
#14 x 2" PH#3	1,000	DMI2A7216995B
#14 x 3" PH#3	1,000	DMI2A7224995B
#14 x 4" PH#3	1,000	DMI2A7232995B
#14 x 5" PH#3	1,000	DMI2A7240995B
#14 x 6" PH#3	1,000	DMI2A7248995B
#14 x 7" PH#3	500	DMI2A7256995B
#14 x 8" PH#3	500	DMI2A7264995B
#14 x 9" PH#3	500	DMI2A7272995B
#14 x 10" PH#3	500	DMI2A7280995B
#14 x 11" PH#3	500	DMI2A7288995B
#14 x 12" PH#3	500	DMI2A7296995B

Strength	Pull out Steel	Pull out Wood/Concr	Size PH3
Tensile:3600	22GA:540	2X : 1" 605	HeadH .118
Torsion:110 inlbs	20GA:630	3/4"PLY:590	HeadD .448
Shear: 2630	18GA:900	4000psi:850	Thread:.238

Structural concrete applications must be pre-drilled with 3/16" bit before installation.

#15-13 DEKFAST™ XHD HIGH STRENGTH FASTENER

Ideal for insulation attachment to wood and light gauge steel. SD#1 point cuts through gravel, BUR and metal up to 18ga. Black Sentri XP long-life coating for extended corrosion protection. The #3PH pan head is compatible with all Dekfast insulation stress and membrane seam plates. Packaged in sealed plastic jobsite pails with one PH3 bit tip per pail. **FM & Dade County Approved**



Available Sizes	Qty/Box	Part#
#15 x 2" PH#3	1,000	DMI2C2010995P
#15 x 3" PH#3	1,000	DMI2C2020995P
#15 x 4" PH#3	1,000	DMI2C2030995P
#15 x 5" PH#3	1,000	DMI2C2040995P
#15 x 6" PH#3	500	DMI2C2050995P
#15 x 7" PH#3	500	DMI2C2060995P
#15 x 8" PH#3	500	DMI2C2070995P
#15 x 9" PH#3	500	DMI2C2075995P
#15 x 10" PH#3	500	DMI2C2080995P
#15 x 11" PH#3	500	Made to Order
#15 x 12" PH#3	250	DMI2C2090995P
#15 x 14" PH#3	250	DMI2C2100995P
#15 x 16" PH#3	250	DMI2C2110995P
#15 x 18" PH#3	250	Made to Order
#15 x 20" PH#3	250	Made to Order
#15 x 22" PH#3	250	Made to Order
#15 x 24" PH#3	250	Made to Order
#15 x 26" PH#3	250	Made to Order
#15 x 28" PH#3	200	Made to Order

Fasteners longer than 4" have 4" of thread starting from the drill tip. Some lengths of #15 XHD have been discontinued and are now available only on a made to order basis (minimums and lead times will apply).

Strength	Pull out Steel	Pull out Wood/Conc	Size PH3
Tensile:4300	22GA:706	2X : 1" 692	HeadH .130
Torsion:130inlbs	20GA:898	3/4"PLY:703	HeadD .448
Shear: 3700	18G:1140	4000psi:728	Thread:.263