

# #12-11 PANCLIP MTW Fastener


## Features and uses:

- Low profile pancake head with internal drive
- DMG85 Silver coating covers the complete fastener.

This fastener meets Florida Building Code corrosion resistance requirements (FBC1506.6) and has a Miami-Dade County P.C Listing # L 16-0706.05 certifying corrosion resistance.

- Applications include panel clip attachment to wood

dimensional lumber, as well as fixture to wood substrate applications.

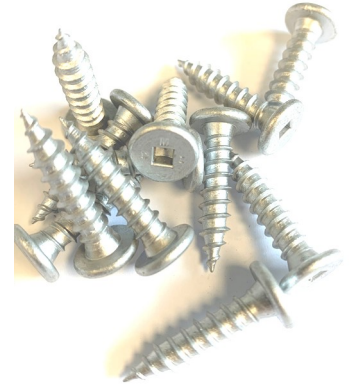

## Specifications

#12-11 x (L) , Type A SP Ctd		
Tensile Strength: 2102 lbs ult		
Torsional:	132 in-lbs	
Shear:	1994 lbs ult	
Pull out :		
SYP 2'x4"	622 lbs ult	
Plywood	3/4"	427 lbs ult
Plywood	5/8"	395 lbs ult
Plywood	1/2"	377 lbs ult
OSB	3/4"	326 lbs ult

Above values are average ultimate values.

Values may change with strength and condition of substrate wood.

Not for use with pressure treated ACQ or MCQ lumber.

COO: Manufactured in Taiwan

## Selection

<u>Sizes</u>	<u>Qty/Box</u>	<u>Part#</u>	<u>M/D Listing #</u>
#12-11 x 3/4"	5,000	DMIPD1203411T	L 16-0706.05
#12-11 x 1"	5,000	DMIPD121011T	L 16-0706.05
#12-11 x 2"	2,000	DMIPD122011T	

## Installation

#2 square drive suggested.

0-2500 rpm electric screw gun with depth sensing nose piece or torque control device.

Do not overdrive or under drive, not suggested for use with impact driver installation tools.

Suggested 1" minimum penetration into substrate.

**Limitations:** Not recommended for installation by impact drivers. Not for use with Copper metal panels

Not for use with pressure treated ACQ or MCQ lumber.

**To find a distributor call 855-800-8878 or visit [www.directmetalsinc.com](http://www.directmetalsinc.com)**