


The Bullet Gooseneck Vent



The Bullet Vent is popular for kitchen and dryer vent exhausts that terminate through a roofing surface. They are designed to be a no-leak and aesthetically pleasing alternative to old style metal gooseneck vents. This innovative product comes with a built in diverter/cricket, a debris screen and rain damper.

Features & Benefits:

- Fast Installation, no painting needed, colored throughout.
- 100% UV protected HD Polypropylene carbonate material.
- Will not crack in hot or cold installations.
- Very affordable with a 35 year manufacturers warranty.
- Built in cricket for enhanced water flow-around.
- Paintable
- Made in the U.S.A.
- Florida Product Approval # FL 25870.2

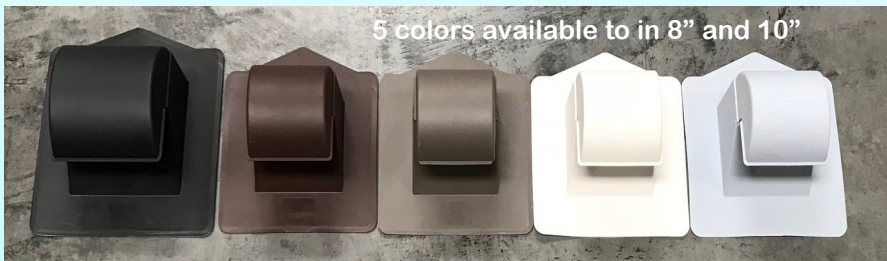

5 colors available to in 8" and 10"

Specifications

UV Protected Polypropylene Carbonate with removable black plastic damper and debris/pest screen.

Service Temp: -59 deg c to 90 deg c

Flange Size: 8" = 14.5 x 16", 10" = 16.5 x 18" flange, 9" = 15.5 x 17.25"

ASTM E330-02, FBC Code 6th Edition 2017 Section 1708.2 compliant.

Wind Uplift Resistance: -305 PSF (12 fasteners)

Design wind uplift pressure resistance in ASD with safety factor of 2-1.

Florida Product Approval # FL25870.2, Evaluation Report 17-209-GN-ER

Environmental Resistance: Excellent resistance to Ozone, UV, water, alcohol, weak acids & chlorine.

Selection

9" Tall for Shingle Roof Installation

Available Size/Color	Qty/Box
8" Black	8
8" Brown	8
8" Gray	8
8" Weathered Wood	8
8" White	8
10" Black	8
10" Brown	8
10" Gray	8
10" Weathered Wood	8
10" White	8

12.5" Tall for Tile Roof Installation

Available Size/Color	Qty/Box
9" Brown	8
9" Gray	8
9" Terracotta	8
9" Weathered Wood	8

Complementary boots also available
see Bullet Boots for plumbing stacks.



Florida Product Approval
#FL 25870.2

