

DMI Utility Exterior Doors




AL26 Door

Features Full 1-3/4" thick panel. Wrap-around design gives commercial look to panel. Pre-hung 4-way universal swing. Frame has common header/threshold and nailing and non-nailing jambs. White frame, White Panel. 2-3/4" backset standard. Stainless Steel Fixed-pin hinges. Nylon lockset insert. Aluminum frame. 26 Ga. door skin.

Options Windows. Dead bolt lockset. Door closer. Double door with astragal. Nail flange - installed or packaged separately. 24 Ga. skins (AL24). Lock sets sold separately.

3/0 x 6/8 Solid White Part# DMWTDR263068 Actual Size 37-5/16" x 81-1/8"

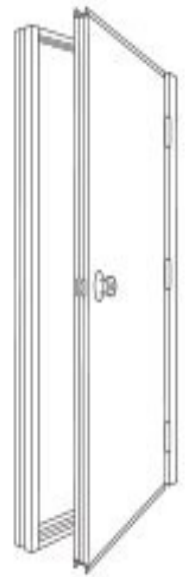

AL26U Utility Door


Features Frame has common header/threshold and nailing flange standard. Full 1-3/4" thick panel. Wrap-around design gives commercial look to panel. . Available in white only. 2-3/4" backset standard. Economy and durability. All aluminum white pre-painted frame. 2-3/4" backset standard. Low maintenance (no painting). Fixed-stainless steel pin hinges. Pre-hung universal swing. Nylon lockset insert eliminates lockset loosening - no wood block to deteriorate or absorb moisture. 26 Ga. Door skin.

Options Windows. Stainless steel roller bearing hinges. Dead bolt lockset. Door closer. Double door with astragal. 24 Ga. skins (AL24U). Lock sets sold separately.

3/0 x 6/8 Solid White Part# DMWAL26U3068 Actual Size 36-13/16" x 80-5/8"



Flange can be installed on either side to provide either inswing or outswing application



To purchase: Direct Metals Inc offers our product through our registered distributors and wholesalers, to find a distributor please call 855-800-8878 or visit www.directmetalsinc.com for product information.