

Industrial Grade
PVC Corrugated Panels
Applications:

- Industrial Buildings
- Cooling Tower Louvers & Casings
- Skylights/Sidelights
- Arched Roofs
- Metal Buildings
- Carports
- Agricultural Buildings
- Compressor Housing
- Elevator Enclosures
- Garages
- Industrial Buildings
- Lean-to's
- Mining Facilities
- Salt Storage Buildings
- Architectural Elements
- Storage Buildings
- Warehouses
- Sheds & Barns
- Awnings & Canopies



DMI
**Corrosion Resistant
Panel Solutions**



Agricultural

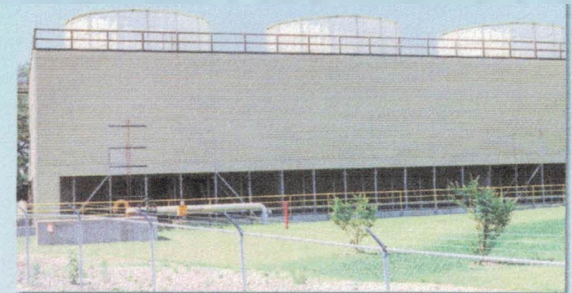


Commercial



Residential

Industrial
I-2
PVC



**Corrugated Siding, Roofing,
and Louver Panels**

**Ideal for UV and Corrosion
Resistant Applications**

DIRECT METALS INC.

Industrial-2 PVC Corrugated Panels

Industrial/Commercial/Residential Siding, Roofing & Louver Panels








Industrial-2 PVC Siding, Roofing and Louver Panels are solid, heavy gauge Polyvinyl Chloride (PVC) extruded sheets that maintain color and structural integrity under the toughest weather conditions and physical abuse.

Industrial-2 PVC is Factory Mutual Approved for unlimited height use, without the need for sprinkler protections, and offers a Non-Combustible Flame Spread Rating of 12. Industrial-2 PVC also performs exceptionally in resisting most corrosive conditions from man organic and inorganic chemical fumes and liquids. Industrial-2 PVC is completely UV resistant and will not yellow or discolor, and will block out harmful UV radiation.

Features:

- Widest range of resistance to corrosion
- Low non-combustible flame spread rating of 12
- UV resistant; will not yellow, turn brittle, or discolor; and blocks harmful UV radiation
- High impact strength; virtually unbreakable
- Solid PVC; no peeling, denting, or loss of structural integrity
- Easy to handle and install
- Cost effective

Industrial Grade / Profile Selection

Profile	Configuration Detail	Width	Lengths Up To	Thickness	Colors	Oz./Ft.2	Conforms To
4.2 Corr		42"	38'	3/32" 1/8" 3/16"	White, Grey White, Grey, Clear, Tan, Blue White, Grey	12 16 24	FRP Asbestos Cement
2.67 x 7/8 C		40"	38'	3/32"	White, Grey, Clear	12	FRP, Steel Aluminum
DMI R5		40-1/4"	38'	3/32"	White, Tan	12	Proprietary Configuration
7.2 Corr		47-7/8"	38'	1/8"	White, Grey, Clear	16	FRP, Steel, Aluminum
GRECA		26" or 38"	Std lengths to 20'4"	1/32"	White	4	Box Rib
SMOOTH		4'x 8' Standard		1/16" 1/8"	White, Grey, Clear, Tan, Blue White, Grey, Clear, Tan, Blue	8 16	
EMBOSSED		4'x 8' Standard		3/32"	White, Tan	12	



I-2 PVC

