


ladderSTEADY



Every time you climb on a roof and leave your ladder unsecured you are taking a risk. The possibility of the ladder blowing off and causing property damage or personal injury is a great concern. In addition to the risk of injury the embarrassment of being stuck on a roof without a ladder is something we all would like to avoid.

The ladderSTEADY product offers a quick, easy and inexpensive way to secure the ladder. Unlike typical rigging methods such as vice grips, clamps, wire or screws and other evasive tie-off techniques the, ladderSTEADY is designed to secure the ladder with out damaging the existing roof.

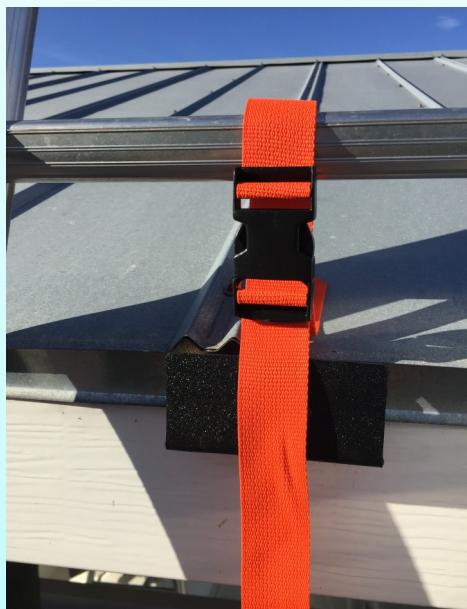

Important !!

This product is not a fall protection device. This product is not for use on ladders longer than 23'11". It's sole purpose is to help prevent ladder "blowoffs" and accidental displacement of un-attended ladders.

Available through registered
Direct Metals Inc distributors. Made in the U.S.A.
Patent Pending



Current universal clip not shown,
representative of application



Selection

<u>Available Sizes</u>	<u>Qty/Box</u>	<u>Part#</u>
Universal	25	DMI9DCU

Installation

How to install the ladderSTEADY

1. Safely position the ladder according to the manufacturer's specifications. Note: Most safety requirements require the ladder to be a minimum of 3' above the eve.
2. Adjust the ladder so that a rung is 10 inches above the drip edge.
3. Insert the ladderSTEADY by sliding under the drip edge or 2x fascia board until secure.
4. Open strap clip, secure strap over the rung and clip the two strap clips together.
5. Pull the strap ends in opposite direction using moderate pressure until tight.
6. Secure excess strap in a safe manor.

To find a distributor call 855-800-8878 or visit www.directmetalsinc.com