DMI Corrugated Polycarbonate Translucent Panels

DMI distributors can offer 4 different thicknesses of our translucent panels that can be made to almost any metal profile. All panel thicknesses are covered by a 10 yr limited warranty for light transmission, yellowing, and breakage due to hail. All thicknesses come with full UV protection built into the panel and all panels are Made in the U.S.A.

DMI offers 8 standard profiles of polycarbonate sheets, this document covers the 405 profiles available my a custom metal match order (see side bar about order minimums). Attached you will find a description and listing of panels in mm measurements. If you see a profile you desire please feel free to ask your salesperson for a more detailed drawing.


When considering a custom match order: Thicker is better:

DMI offers 1.0mm and 1.5mm Mega HD and 2.0mm XHD extra heavy duty commercial grade panels in our custom program.

For the customers who want to invest in the strongest profiled panel we offer the **Mega 1.5mm** panel. It is up to 93% thicker than the competitors 0.8mm thick panels and offers higher wind load and snow loading capabilities.

Following this page you will find 4 pages of standard stock profiles followed by 38 pages of possible made to order profiles.



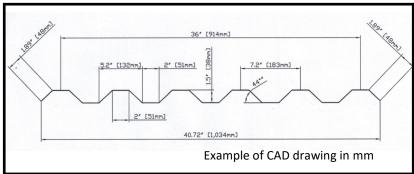

To find a distributor call 855-800-8878 or visit www.directmetalsinc.com

Custom Metal Match order procedures and minimums

Profile Selection

There are two types of Custom Metal Match orders.

Type #1 order: Pick from our list (attached below) of non standard Custom Panels that we have made for previous customers, DMI has CAD drawings and Profile lists available on request. Customer must sign off on CAD drawing prior to product production.

Type #2 order: Design from Scratch, send DMI a CAD drawing or 2 full width by 3' long metal panel samples and we will determine if this panel can be produced. Once we determine the panel can be manufactured we will draft and provide a CAD drawing for sign-off prior to product production.

Order Minimums

Type #1 order: Pick from our list

1.0mm in Clear or Opal White or Bronze 10,000 sq ft (ex: 275 Panels at 3' x 12')

1.5mm in Clear or Opal White or Bronze 7,000 sq ft (ex: 195 Panels at 3' x 12')

Type #2 order: Design and Manufacture

1.0mm in Clear or Opal White or Bronze 20,000 sq ft (ex: 550 Panels at 3' x 12')

1.5mm in Clear or Opal White or Bronze 13,000 sq ft (ex: 360 Panels at 3' x 12')

Type #2 order minimums may be lower depending on complexity of panel configuration. If you provide a CAD Drawing a specific quotation will be generated.

Lead Times

Lead times vary from 3 weeks to 8 weeks depending on current plant schedules. Please consult your salesperson for estimate. Leads times start after the signoff of panel profile is completed.

Special order Terms

Made to order products require 50% payment prior to production and the balance 50% payment made at the time of shipping. All special order items sales or final and the terms are no returns.



2.0mm MEGA HD polycarbonate panel panels are designed for use in steel buildings where purlin spans can be up to 5' apart. These panels are also popular for canopies and patio coverings in pool areas and screen cage applications. Commercial Greenhouses, Home Greenhouses, Office Partitions, Vertical Glazing, Industrial Roofing, Pool Enclosures, Patio Covering, Window Replacement, Fiberglass Skylight Panel replacement, Metal Building Skylights, Domes, Shelters, Canopies, Sheds, Carports, Sunrooms, Sidelites.

DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels in 1.0mm, 1.5mm, and 2.0mm thick in many different corrugations.

Below you will find our quick ship panel options on 2.0mm thick commercial grade polycarbonate panels.

2.0mm Commercial Grade Panels

Profile/Color	Length W	HSE_	Part# Light Transmis	ssion
MR12 Silver	12'	1,2	DMPCMR12XHS12	20%
7.2 Corr Soft \	White 12'	2	DMP2.072MR12SW	78%


Installation Accessories

Description	Length	Part#
PC to Steel SD Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8'	' 45'	DMBT3323845
Butyl*Roll Seam Tape 7/8'	't 25'	DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C
Fall Guard Protection Scn	F-310	FGF310


2.0mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE



MR12	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	. Available colors:
2.0	38"	36"	12"	1.25"	



7.2 Corr	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
2.0	40.72"	36"	7.2"	1.5"	

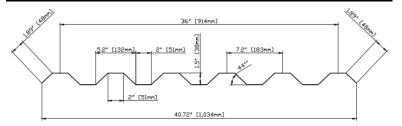

Important things to know:

- 1. All sales final no returns
- The above fasteners and accessories are required for approved installation and warranty validity.
- 3. It is suggested to register the warranty with DMI.
- 4. Shipping charges and packaging charges may be additional.
- Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
- All fastening points must be pre-drilled to allow for expansion and contraction of the product.
- When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
- 8. Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.

Available for purchase from DMI Distributor below
Installation instructions at www.directmetalsinc.com



1.5mm MEGA HD polycarbonate panel panels are designed for use in steel buildings where purlin spans can be up to 5' apart. These panels are also popular for canopies and patio coverings in pool areas and screen cage applications. Commercial Greenhouses, Home Greenhouses, Office Partitions, Vertical Glazing, Industrial Roofing, Pool Enclosures, Patio Covering, Window Replacement, Fiberglass Skylight Panel replacement, Metal Building Skylights, Domes, Shelters, Canopies, Sheds, Carports, Sunrooms, Sidelites.

DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels in 1.0mm, 1.5mm, and 2.0mm thick in many different corrugations.

Below you will find our quick ship panel options on 1.5mm thick commercial grade polycarbonate panels.

1.5mm MEGA HD Grade Panels

Profile/Color	Length	WHSE	Part# Light Transmi	ssion
MR9 Clear	12'	2	DMPCMR9MC12	88%
MR9 White	12'	2	DMPCMR9MW12	43%
MR12 Clear F	FBC 12'	1	DMPR1MSCL12	88%
MR12 White F	BC 12'	1	DMPR1MSWT12	43%
BR2 Soft Whit	te 12'	1	DMPRBR215SW12	78%

Installation Accessories

		.00
<u>Description</u>	Length	Part#
PC to Steel SDFBC Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8"	45'	DMBT3323845
Butyl*Roll Seam Tape 7/8"	t 25'	DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C
Fall Guard Protection Scn	F-310	FGF310


Important things to know:

- 1. All sales final no returns
- The above fasteners and accessories are required for approved installation and warranty validity.
- 3. It is suggested to register the warranty with DMI.
- Shipping charges and packaging charges may be additional.
- Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
- All fastening points must be pre-drilled to allow for expansion and contraction of the product.
- When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
- 8. Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.


1.5mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE




MR12 FBC	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Clear, White
FL11238.2	38"	36"	12"	1.25"	



MR9	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Clear, White
3/4" RIB	38"	36"	9"	.75"	

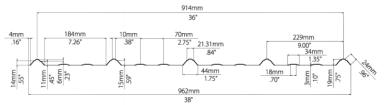

BR2	Overall Width	Net Coverage	Pitch / On Center	Depth /	Available colors: Soft White
Butler Rib 2	39.8"	36"	12"	1.5"	Soft White

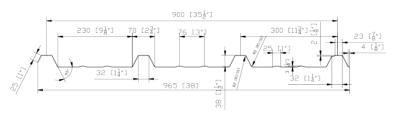

Available for purchase from DMI Distributor below
Installation instructions at www.directmetalsinc.com



DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels in 1.0mm, 1.5mm, and 2.0mm thick.

Below you will find our quick ship panel options on 1.0mm thick commercial grade polycarbonate panels. Made in the USA, in stock and ready to ship from a DMI Service Center.

1.0mm Commercial Grade Panels

Length	WHSE	Part# Light Transr	nission
12'	1,2	DMP341MSCL12	90%
12'	1,2	DMP341MSWT12	45%
BC 12'	1,2	DMPR1MSCL12	90%
BC 12'	1,2	DMPR1MSWT12	45%
12'	1	DMPR1MSGR12	35%
12'	1	DMP51M5VWT12	45%
12'	1	DMP10925312C	90%
e 12'	1	DMP10924912W	90%
12'	Call	DMIPC727012C	90%
	12' 12' FBC 12' FBC 12' 12' 12' 12' 12'	12' 1,2 12' 1,2 18C 12' 1,2 18C 12' 1,2 12' 1 12' 1 12' 1 12' 1 12' 1	12' 1,2 DMP341MSWT12 FBC12' 1,2 DMPR1MSCL12 FBC 12' 1,2 DMPR1MSWT12 FBC 12' 1,2 DMPR1MSWT12 FBC 12' 1 DMPR1MSGR12 FBC 12' 1 DMP51M5VWT12 FBC 12' 1 DMP10925312C FBC 12' 1 DMP10924912W

Installation Accessories

<u>Description</u>	<u>Length</u>	Part#
PC to Steel SDFBC Screw	1-1/4"	DMIPOSD14150W11
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8"	45'	DMBT3323845
Butyl*Roll Seam Tape 7/8"	t 25'	DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C

4




Important things to know:

- 1. All sales final no returns
- The above fasteners and accessories are required for approved installation and warranty validity.
- 3. It is suggested to register the warranty with DMI.
- Shipping charges and packaging charges may be additional.
- Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
- All fastening points must be pre-drilled to allow for expansion and contraction of the product.
- When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
- Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.


Find installation instructions at www.directmetalsinc.com

1.0mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE


MR12	Overall	Net Coverage	Pitch /	Depth /	Available colors:
FL11238.1	Width		On Center	RHeight	Clear, White , Bronze
FBC,TDI	38"	36"	12"	1.25"	




MR9	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Clear, White
	38"	36"	9"	.75"	




5V	Overall Width	Net Coverage	Pitch /	Depth /	Available colors:
	vviatri		On Center	RHeight	White
	26"	24"	12"	0.5"	




2.67 SP	Overall Width	Net Coverage	Pitch /	Depth /	Available colors:
			On Center	RHeight	Clear, White
	34.25"	32"	2.67"	7/8"	



DMIPC 7270	Overall Width	Net Coverage	Pitch / On Center		Special Order with Minimums:
Special Order	39.8"	36"	12"	1.5	Clear, White, Soft White, Bronze, Silver



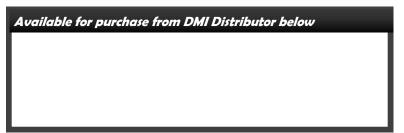



DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels including 0.8mm 1.0mm, 1.5mm, and 2.0mm thick.

Below you will find our quick ship panel options on 0.8mm thick polycarbonate panels.

Made in the USA, in stock and ready to ship from a DMI Service Center.

0.8mm Economy Grade Panels

Profile/Color Length W	HSE	Part# Light Transm	<u>iission</u>
MR12 White 12'	1	DMPR08MSWT12	45%
MR9 Clear 8', 10', 12', 24	1'2	DMPR.8MSCL9(L)	90%
MR9 White 8', 10', 12'	2	DMPR.8MSWT9(L)	45%
PBU Clear 12'	1	DMPRU12C.8	90%
Mini Corr Clear 12'	2	DMIP140617	90%

Suntuf available by special order and ships from warehouse 7 in PA. Suntuf is packaged and sold in 10 piece bundles.

Installation Accessories

Description	Length	Part#
PC to Steel SDFBC Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8"	45'	DMBT3323845
Butyl*Roll Seam Tape 7/8"		DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C




Important things to know:


- 1. All sales final no returns
- The above fasteners and accessories are required for approved installation and warranty validity.
- 3. It is suggested to register the warranty with DMI.
- Shipping charges and packaging charges may be additional.
- Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
- 6. All fastening points must be pre-drilled to allow for expansion and contraction of the product.
- When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
- Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.

O.8mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE

MR12	Overall Width	Net Coverage	Pitch / On Center		Available colors: White
	38"	36"	12"	1.25"	



MR9	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Clear, White
	38"	36"	9"	.75"	



	PBU	Overall Width	Net Coverage	Pitch /	Depth /	Available colors:
		Widti		On Center	RHeight	Clear
ļ		38.25"	36"	6"	0.75"	



	C7/IIIIII							
Mini Corr	Overall	Net Coverage	Pitch /	Depth /	Special Order with			
	Width		On Center	RHeight	Minimums:			
Special	26"	25"	1.26"	0.35"	Clear, White			
Order								



Suntuf	Overall Width	Net Coverage	Pitch /	Depth /	Available colors:
	vviatri		On Center	RHeight	Clear, White, Solar
Special order	26"	24"	3.0"	5/8"	



Suntuf Accessories

The following accessories are available for use in your Suntuf installation. Note these accessories are made for use with the Suntuf profile panels and may not be compatible for use with other DMI polycarbonate products.

- 1. Suntuf Ridge Cap Flashings (4'2" L x 12" W)
- 2. Suntuf Side Ridge flashing (4'2" L x 7" W)
- 3. Suntuf Wall Connector Flashing (4'2" L x 8" W)











1	100	250/40 Industrial	1000 (39.4°)	250	40	1063
2	101	250/40 Industrial	1000 (39.4°)	250	40	1063
3	200	HP 207/35 E35D	1035 (40.7°)	207	34	1104
4	201	SAB 40/915, HP 40/183, E40D, TR40S	915 (36°)	183	40	970
5	202	HP 35/207, E35, SAB 35 1035/35	1035 (40.7°)	207	35	1070
6	304	Trapeze 275/30	1100 (43.3°)	275	30	275
7	400	CM204-30	1020 (40.2°)	204	30	1100
8	401	CM204-30 M	1021 (40.2°)	204.2	30	204.2
9	402	CM 40/964	964 (38°)	241	40	1078
10	600	LCS\T\I-0600	1070 (42.1°)	214	28	214
11	800	LCS\T\I-0800	1000 (39.4°)	333.3	42	1053

12	900	LCS\TV-0900	1000 (39.4°)	3333	38	3333.3
13	1100	Trapeze 112/27.5 28/1011	896 (35.3°)	112	27.5	27.5
14	1200	Trapeze 200/32	1000 (39.4°)	200	32	1086
15	1300	Trimdek 1875/24	750 (29 <i>5</i> °)	187.5	24	24
16	1400	LCS\TV-1400	1000 (39.4°)	333.3	39	333.3
17	1500	Abonos	720 (283°)	144	25.4	25.4
18	1600	Nito	1022 (40.2°)	146	23.5	1074
19	1800	Proclad 32/1000	1000 (39.4°)	200	32	1074
20	2011	SAB 40/915	915 (36°)	183	40	945.7
21	2200	Trapeze 250/40	1000 (39.4°)	250	40	250
22	2300	Trapeze 196/40	980 (38.6°)	196	40	196

23	2400	IBR 171.5/37	686 (27°)	171.5	37	755
24	2600	TR-4	955 (37.6°)	320, 315	43.4	320 315 320 43.4 990
25	2800	Trapeze 333.3/44	1000 (39.4°)	333.3	44	1098
26	2900	Amanco	1000 (39.4°)	333,334	35	333 333 334 335
27	3100	Multi Rib Panel	914 (36°)	304.8	31.75	304.8 965.2 31.75
28	3200	Trapeze 265/30.3	1060 (41.7°)	265	30.3	1126.5
29	3300	AR-PANEL	914 (36°)	229	16	968
30	3500	Trapeze 250/40	1000 (39.4°)	250	40	1040
31	3600	Coverib 1000	892 (35.1°)	297.5	37	297.5
32	3700	333339T	1000 (39.4°)	333.3	38	333.3
33	3800	M 250/50	1000 (39.4°)	250	48	1115

34	3801	50/250/1060	1000 (39.4°)	250	48	250
35	4000	Arcelor	1000 (39.4°)	333.3	45	333.3
36	4100	Day Brazil	1020 (40.2°)	255	40	1132
37	4303	Interfibras	1000 (39.4°)	250	35	1052
38	4600	Trapeze 193.2/32	773 (30.4°)	193.2	32	193.2 850.7
39	5000	Fielders Trimdek 190/26	760 (29.9°)	190	26	190 822 26
40	5100	333/50 i	1000 (39.4°)	333.3	50	1090
41	5200	200-32 i	1000 (39.4°)	200	32	1068.4
42	5300	LP-1000	1000 (39.4°)	166.6	19	1060
43	5400	Uni-Rib	912 (35.9°)	304	22.5	990
44	5500	PMF 32/1000 VH 200.32.P	1000 (39.4°)	200	32	1072

45	5500R	PMF 32/1000 VH 200.32.P	1000 (39.4°)	200	32	32
46	5600	200/25F	1000 (39.4°)	200	25.4	25.4
47	5700	Trapeze 12/1 i	914 (36°)	304.8	25.4	982
48	5800	Metechno P1000-G4	1000 (39.4°)	333.3	42	333.3
49	5900	Formaclad 166/32 i	1000 (39.4°)	166.7	32	166.7
50	6000	Perfil Termacustico	730 (28.7°)	146	26	820
51	6010	Klauer Frontier	914 (36°)	228.6	17.6	228.6 968.6
52	6040	TATA Bluescope Trimdek	1015 (40°)	203	28.5	203
53	6050	Stormtuf	914 (36°)	152.4	57	991.31
54	6060	Stabilit P55	870 (34.3°)	174	54	919.3
55	6070	Arkos 210-23-1134	1050 (41.3°)	210	23	23

56	6080	MR-24	480 (18.9°)	480	473	480
57	6090	Cannonball - USA	466.7 (18.4°)		24.4	122.6 466.6 612.7
58	6100	Cindu - Guatamala	790 (31.1°)	1975	34	197.5
59	6110	Mivne Darom - Top Panel	960 (37.8°)	240	35	35
60	6120	Viner Industries	990 (39°)	330	36	330
61	6130	DVP PV6	910 (35.8°)	174, 194	50	174 194 174 194 174 50
62	6140	Isopan 250/40	1000 (39.4°)	250	39	1035
63	6150	4.265.27B Haironville	1060 (41.7°)	265	25	265
64	6160	Cobacier 1004	1000 (39.4°)	250	40	250
65	6170	Albani-e-Ruggieri 310	1240 (48.8°)	310	45	1295
66	6171	De Filippo Main	1242 (48.9°)	3105	55	1295

67	6172	De Filippo Side	1142 (45°)	3105 2105	45	310.5 210.5 45
68	6180	Quedron 1067 20C	1067 (42°)	152.4	20	1524
69	6190	Varco Pruden	1028 (40.5°)	342.B	30.2	342.8
70	6200	Perflex 336x45	1010 (39.8°)	336.7	45	336.7
71	6210	112/28	896 (35.3°)	112	28	974
72	6220	Nervesco 1000TS	1000 (39.4°)	3333	45	333.3
73	6230	166-25	996 (39.2°)	166	25	1059
74	6240	178-40	890 (35°)	178	40	945
75	6250	257-38	1028 (40.5°)	257	38	1078.7
76	6260	Nergal 1000	1000 (39.4°)	3333	45	333.3
77	6270	Liting 158/38	1106 (43.5°)	158	37	158 1048

78	6280	Hi Rib Tracedek	1008 (39.7°)	252	28	252
79	6290	Twinrib	700 (27.6°)	191.2	52	191.2 52
80	6300	Sflok Saf 700	700 (27.6°)	233	40	752
81	6310	Mau Tole Song Cliplock	969 (38.1°)	323	40	1023
82	6320	Isocopre	1000 (39.4°)	200	38	1050
83	6330	DV4	984 (38.7°)	328	40	328
84	6340	39/180	900 (35.4°)	180	39	936.3
85	6350	Perfil 40	1000 (39.4°)	250	40	250
86	6360	12/0.875	914 (36°)	304.8	22.2	985 (38.8")
87	6370	E36 KD	1000 (39.4°)	250	36	250
88	6380	S Profile	1000 (39.4°)	250	34	1075

89	6390	RGL 40	1002 (39.4°)	198,201	40	198-201
90	6400	7 Saf 889	889 (35°)	127	38	958
91	6410	250/38	1000 (39.4°)	250	38	1034
92	6420	G200 / 30-007	800 (31.5°)	200	30	840
93	6430	1035/5	1000 (39.4°)	250	40	1035
94	6440	333/38	1000 (39.4°)	333	38	333
95	6450	Calaminon Curvo	1021 (40.2°)	256.5 254	28	256.5 254 28
96	6460	Nervesco 25/108S B	1085 (42.7°)	180.8	25	180.8
97	6470	LG 28	1120 (44.1″)	112	275	27.5
98	6480	LG 40	1075 (42.3°)	215	40	1155
99	6490	LG 38	920 (36.2*)	184	37.5	946.5

100	6500	IBR Saf 686	686 (27°)	171.5	365	171.5 36.5
101	6510	MG-30/206 CM 30/1030	1030 (40.6°)	206	32	1110
102	6520	MBS 20 PTP	1100 (43.3°)	1375	18	137.5
103	6530	MBS PTA 45	900 (35.4°)	150	45	945
104	6540	125/30	1000 (39.4°)	125	30	125
105	6550	TR-4 1000	1000 (39.4°)	333.3	45	1033
106	6560	207/35-902	828 (32.6°)	270	35	902
107	6570	ER-32/251	1006 (39.6°)	251.1	32	32
108	6580	SAF 760	760 (29.9°)	190	28.5	28.5
109	6590	UT-32	1000 (39.4°)	200	31.5	31.5
110	6600	Widek Saf 760	760 (29.9°)	190	285	190 285

111	6610	Walters Panel	914 (36°)	304.8	20.9	957.6
112	6620	HV 3510/6	1000 (39.4°)	200	35	1044
113	6630	FP20 wand	1088 (42.8°)	136	17	1145
114	6640	KL-770	771 (30.4°)	257	31.3	313
115	6650	G200/40-070	1000 (39.4")	200	40	1050
116	6660	Brollo TD-5	1000 (39.4°)	250	39	1038
117	6670	300/35	900 (35.4°)	300	35	995.5
118	6680	G207/35-097	1035 (40.7°)	207	35	1075
119	6690	Sintostamp 200/38	1000 (39.4°)	200	38	1038
120	6700	Superclad	890 (35°)	178	37	956
121	6710	5V-Crimp	610 (24°)	6.09.6	12.7	666.1

122	6720	Roof & Wall	1000 (39.4°)	250	40	250
123	6730	Pennar Roof & Wall Panel	1000 (39.4")	3333	32	333.3
124	6740	CY34	1000 (39.4°)	200	34	1070
125	6750	250/40-1058	1000 (39.4")	250	40	1058
126	6760	5-183-398	915 (36°)	183	395	39.5
127	6770	AF-38/1025	1025 (40.4")	205	38	1094
128	6780	Greca Drain	923 (36.3°)	76.2	11.1	967.1
129	6790	AF-38/990	990(397)	165	38	1056
130	6800	Cindulit 180	702 (27.6°)	175.5	34	780
131	6810	Anborg 250/40	1000 (39.4°)	250	40	1094
132	6820	4-33-1070	1070 (42.17)	2675	32	267.5 1114

133	6830	PL 4/46/1000	1000 (39.4°)	250	46.3	1048
134	6840	1030.8.25	1030 (40.6°)	128.75	25	1127
135	6850	Galagan 50/150	900 (35.4°)	180	50	1100
136	6860	160/14N	1120 (44.1°)	160	14	1153
137	6870	Trapeze 333/40	1000 (39.4°)	333	40	1034
138	6880	Trapeze 125/20	1000 (39.4°)	125	20	1050
139	6890	Aceralia 30/209	1045 (41.1″)	209	30	209
140	6900	No.5 250/40	1000 (39.4°)	250	40	250 1041 40
141	6910	G180/43-222	900 (35.4°)	180	43	993
142	6920	Pazko Profile	1008 (39.7°)	201	24	201
143	6930	Everdrain Panel	914 (36°)	152	12	966

144	6940	Butler Rib II	900 (35.4°)	300	38	965
145	6950	Trapeze 32/250	1000 (39.4°)	250	32	250
146	6960	G115/17-153	1035 (40.7°)	115	17	1090
147	6970	G138/17-02E	1100 (43.3°)	137	18	137
148	6980	G160/39-02D	960 (37.8°)	160	39	1030
149	6990	3-305- 9 6	915 (36°)	305	96	979
150	7000	Bax Rib	762 (30°)	152.5	38	152.5 846
151	7010	Steel Rolling	1000 (39.4°)	250	38	1042
152	7020	Longrib 1000R	1000 (39.47)	200	35	1060
153	7030	Trim Rib profile	760 (29.9°)	190	295	29.5
154	7040	Trapeze 18/115	1035 (40.7°)	115	17	1063

155	7050	HR3 Panel	1016 (40°)	508	35	508
156	7060	Behlen 12/15	915 (36°)	304.8	30.2	304.8 985.8 (38 ¹² / ₁₆)
157	7070	KR Panel	1000 (39.4°)	3333	38	333.3 1066.7
158	7071	Skylight KR Panel	1000 (39.4°)	3333	32	333.3
159	7080	Trapeze 124/30	990 (39°)	123.75	30	123.75
160	7090	Trepeze 180/50	900 (35.4°)	1525	38	152.5
161	7100	Clearlight EP 1000-19	1000 (39.4°)	250	19	1059
162	7110	KW Panel	1000 (39.4°)	33333	2656	26.56
163	7120	C20A	1000 (39.4°)	1375	17	137.5
164	7130	SW-150	900 (35.4°)	150	35	942 (37.1")
165	7140	Guadeloupe 3.273.39	819 (32.2°)	273	39	273

166	7150	112/27.5/1124	1000	112	27.5	27.5
167	7160	JI 106 Adaption	1000	250	60	250 60
168	7170	G250/50-137	914.4 (36°)	250	50	250
169	7180	ATI 1	1040	143	34	143 1064.2 34
170	7190	LO-PRO 2.67	1008	67.5	12.7	67.5
171	7200	Clearlight 1000-32	1025	200	32	1084
172	7210	45KD/1000	1001	333.3	45	1055
173	7220	Nucor Classic Wall Panel	914.4 (36°)	200	31.6	995.8 (39.2°) 31.6
174	7230	Greca 80/20	1016 (40°)	80	20	1132
175	7240	Metalco Lámina Rectangular	914.4 (36°)	144	25	1066
176	7250	T35/205	1100 (43.3°)	205	35	1065.6

177	7260	TR 32x250	1100 (43.3°)	250	33	250 1058.2
178	7270	Mitchel Architectural Panel	1025 (40.4°)	304.8	38.1	304.8 38.1
179	7280	Hi-Rib Panel	840 (33.1°)	254	25.4	25.4
180	7300	Val-Rīb	914 (367)	228.6	19.1	991 (39")
181	7310	MP-20	1045 (41.1°)	1375	17	137.5
182	7320	C40 1025	900 (35.4°)	205	40	1083.3
183	7330	30/210	400 (15.7°)	210	30	900
184	7340	30/206/1110	950 (37.4°)	206	30	11102
185	7350	KLIPLOK 700	700 (27.6°)	233.3	43	766.6
186	7360	30/209/1045	1000 (39.4°)	209	30	1075.4
187	7370	40/300	900 (35.4°)	190	395	951

188	7380	45/200/400	400 (15.7°)	200	45	450
189	7400	PRECOR TR6	950 (37.4°)	190	395	39.5
190	7430	TR-5	1025 (40.4°)	256.2	33	1096
191	7440	45/971	970.8 (38.2°)	323.7 323.4	45	323.7 323.4 323.7 45
192	7450	P-1000-40	1000 (39.4°)	250	40	1032
193	7460	35/207/1075	1035 (40.7°)	207	35	1075
194	7470	Alexform	1000 (39.4°)	250	38	1093
195	7480	Eurocover 40N	1023 (40.3°)	341	39	341
196	7490	Calaminon GL-1000	1000 (39.4°)	3333	45	3333
197	7500	R-38 a	914.4 (36°)	152.4	38	152.4 985
198	7510	20/305	915 (36°)	305	39.5	305 1044 (37.7°)

199	7520	38/125	1000 (39.4°)	125	38	125 1044 38
200	7530	40/1020	1020 (40.1°)	343 334	40	343 334 343 40
201	7540	38/130	910 (35.8°)	130	38	962.4
202	7550	30/262	1048 (41.26°)	262	30	11273
203	7560	31/200	1000 (39.4°)	200	31	1070.7
204	7570	E-71	764 (30°)	191	25	25
205	7580	MOSCPRN 5	900 (35.43°)	300	38	300
206	7590	36/250	1000 (39.4°)	250	35	1072.6
207	7600	CL6-914	914.4 (36°)	152.4	19	978 (38 1/2")
208	7610	ASC R-Panel PBL	914.4 (36°)	304.8	31.7	304.8
209	7620	Sinus 27/100	1000 (39.4°)	100	27	1032

210	7630	Kirby KSS600	644 (25.35°)		55.1	675.6
211	7640	6-175-25HB	1050 (41.33°)	178	25	175
212	7650	33.5/250	1000 (39.4°)	250	335	250 10845
213	7660	200/44/1045	1000 (39.4°)	200	44	1045
214	7670	38.4/250	1000 (39.4°)	250	38.4	250 38.4
215	7680	Teczone 32	1050 (41.33°)	262.5	32	262.5 1131
216	7690	T20-79-1100	1100 (43.3°)	16.5	16.5	165
217	7700	PR Panel	900 (35.4°)	300	31.7	300 945 31.7
218	7710	T35-25W-1050	1050 (41.33°)	175	30	175
219	7720	T20	1113 (43.8°)	159	185	1165
220	7730	Cril Hispan 500	500 (19.7°)	250	35	250

	221	7740	42/333	999 (39.33°)	333	42	1050
-	222	7750	31.75/302.9/908.7	908.7 (35.78°)	302.9	31.75	302.9
•	223	7760	Phoenix SSR 60/S42	470 (18.5°)		60	542.1 (21.34")
	224	7770	PTH-S	966 (38.03°)	322	96	96
	225	7780	40/175/760	700 (27.56°)	175	40	760 (29.92°)
	226	7790	42 R-Panel	1028.7 (40.5°)	275.2	25.4	275.2
	227	7800	Mighty Rib	914.4 (36°)	275.2	30.4	996
	228	7810	Eurobase 56	950 (37.4°)	2375	56	237.5
	229	7820	MW52 32/1000	1000 (39.4°)	200	32	1066
-	230	7830	137.5/175/1141	1100 (43.3°)	1375	175	137.5
	231	7840	25/142	993 (39.1°)	142	25	1055

232	7850	32/166.7/1081	1000.2 (39.4°)	166.7	32	166.7
233	7860	44/202	1010 (39.76°)	202	44	1080
234	7870	Rigidal 6	900 (35.43°)	150	32	955
235	7880	27.5/112/1021	896 (35.27°)	112	275	1021
236	7890	E-101 (25.4/140)	980 (38.58°)	140 (5.51°)	25.4 (1″)	140 (5.51°) 1050
237	7900	Supervic Pro 0360	760.9 (30°)	253.6	19.1	253.6 840
238	7910	Comintes RoofTop			69.5	1046.4
239	7920	Comintes Roof Side		126	15	1063
240	7930	5-8003		126	15	126
241	7940	S-852		106	15	649.6
242	7950	ASC Super Span	914.4 (36°)	304.8	31.75 (25.57°)	990.5 304.8 31.3 (25.5

243	7960	K1-1700	999 (39.33°)	131	15	131
244	7970	K1-1754	995.7 (39.2°)	131	15	131
245	7980	Alutech Estructural	995.7 (39.2°)	142.2	22.9	142.2
246	7990	Alutech Millenia	990.6 (39°)	330.2	37.34	330.2
247	8000	KingKlip	700 (27.6°)	233.3	42	752
248	8010	28/196	980 (38.58°)	196	28	196
249	8020	40/250/1047	1000 (39.4°)	250	40	1047
250	8030	Delta Rib II	609.6 (24°)	203.2 (8°)	20.65 0.108°	203.2 (8°) 20.65 0.108
251	8040	TR 55/250	1000 (39.4°)	250	55	250
252	8050	18/115 1063 R4	1035 (40.74°)	115	18	1063
253	8060	25/275	1100 (43.30°)	275	25	275

254	8070	Roof Deck 40/250	1067.B (42°)	250.1	40	250.1
255	8080	29/208	1040 (41″)	208	29	208
256	8090	38/309	927 (36.5°)	309	38	309
257	8100	Mirplast	840 (33.1°)	210	40	902
258	8110	CM 40/200-1000	1000 (39.4°)	200	40	1030
259	8120	Calaminon AL-106	902 (35.5°)	451	118	1131
260	8130	50/30 /331/993	993 (39.1°)	331	50	331
261	8140	HT-40 (40/250)	1000 (39.4°)	250	40	1096.6
262	8150	32/250	1000 (39.4°)	250	32	250
263	8160	TP-20D	1100 (43.3°)	1375	17	1137.5
264	8170	35/333.3	1000 (39.4°)	333.33	35	333.33

265	8180	25/210	840 (33.1°)	210	25	25
266	8190	26/205	820 (32.3°)	205	26	205
267	8200	Penta	1000 (39.4°)	250	31	1031.4
268	8201	Penta Modified	1000 (39.4°)	250	40	1047
269	8210	5801 80/42/333	1000 (39.4°)	3333	80	3333 80
270	8220	Metroclad 16/210	840 (33.1°)	210	16	210
271	8230	ER 30/200	1000 (39.4°)	200	30	1066.5
272	8240	INCO 30.5.Cubierta	1050 (41.33°)	210	30	1099
273	8250	O-METALL 40.250.4	1000 (39.4°)	250	40	1057
274	8260	O-METALL 45.333.3	1000 (39.4°)	333.33	45	1053
275	8270	IT5 37/171.5	857.5 (33.75°)	171.5	37	915

276	8280	BHC 37/330	330 (13*)	330	37	330
277	8290	AVIVA 60/300	900 (35.43°)	300	39	300
278	8300	Strong Panel	1000 (39.4°)	267.5	25	267.5
279	8310	JI 35-207-1035R	1035 (40.74°)	207	52	1080
280	8320	M 40/333	1000 (39.4°)	333.3	36	333.3
281	8330	M 32/207	1035 (40.74°)	207	39	1074.9
282	8340	M 20/210	1050 (41.33°)	210	19	1114
283	8350	Ridge-Cap 24/602	1204 (47.4°)	602	23.8	1267
284	8360	IT-6 32/150	900 (35.43 [*])	150	32	150 966 32
285	8370	TN2/40 - 250/104	1000 (39.4°)	250	40	1037.4
286	8380	Arrow Panel	243.3 (9.6°)	243.4	37	243.4

287	8390	Euroclad MW5 32/200/1000	1000 (13°)	200	32	1069.7
288	8400	200/39	1000 (39.4°)	200	39	1050
289	8410	TOPDEK 38/200	1000 (39.4°)	200	38	1075.4
290	8420	Sinus 30/167	1000 (39.4°)	166.7	30	1100
291	8430	AEP SPAN 35/116	811.2 (31.9°)	115.9	34.9	115.9 34.9 811.2
292	8440	TR 32.207 SK	1035 (40.74°)	207	31	1035
293	8450	TR 39.333 SK 38.5/333	1000 (39.4°)	3333	385	333.3
294	8460	IT-6 32/150 1000	900 (35.43°)	150	32	150
295	8470	28/147 R32	735 (28.93°)	147	28	795
296	8480	HC35	1000 (39.4°)	200	35	1060
297	8490	P08 27.5/120/1097	1080 (42.5")	120	29.5	120 295

298	8500	Nervesco 4.25.1070	1070 (42.1°)	267.5	25	267.5
299	8510	O-METALL 40/250/1041	1000 (39.4°)	250	40	915
300	8520	45/250-1043	1000 (39.4°)	250	45	1000
301	8530	Trimdek Ti-lite 25/189	826 (32.5°)	189	25	189
302	8540	PK-20 18/136.25	1090 (42.9°)	136.2	18	136.2
303	8550	DUPLO 37/1099/1165	1098.7 (43.25°)	1098.7	37.25	1098.7
304	8560	DUPLO 65/1137	1094.1 (43.1°)	304.5	65.3	304.5
305	8570	39/250/1035	1000 (39.4°)	250	39	1035
306	8580	40/190/993	950 (37.4°)	190	40	993.1
307	8590	Chapa Ach 40/250 1051	1000 (39.4°)	250	39	1051
308	8600	MT-52	895 (35.2°)	179	52	961

309	8610	PR/38-300/980	900 (35.43°)	300	38	981.6
310	8620	C44-1000	1000 (39.4°)	200	44	1058.8
311	8630	28/190/835	760 (29.92°)	190	28	190
312	8640	30/270	1080 (42.51°)	270	30	915
313	8650	Century Rib 21/3048	914.4 (36°)	304.8	21	974.1
314	8660	39/300	900 (35.43°)	300	39	300
315	8670	38/151	906 (35.66°)	151	38	957
316	8680	M 40/183	915 (36°)	183	40	952.3
317	8690	T-218	1003.5 (39.5°)	144	64	1068.76
318	8700	Calaminon Ti	1059 (41.7°)	353	36	353
319	8710	H60 60/845/904	844.8 (33.25°)	2112	60	904

320	8720	NB 32-5-1000 32/250 R12	1000 (39.4°)	250	32	1090
321	8730	T6-A WP 1.5/7.2	912.8 (35.93°)	182.6	38.1	182.6 965.2 38.1
322	8740	C-8 8/115 1188	1150 (39.4°)	115	8	115
323	8750	40/333.33	1000 (39.4°)	333.33	40	333.33
324	8760	33/198	990 (38.97°)	198	33	1039
325	8770	50/200	600 (23.62°)	200	50	675
326	8780	32/300/900 R4	900 (35.43°)	300	32	942
327	8790	TR50 R 48/262.5	1050 (41.33°)	262.5	47	1130
328	8800	Polyarq	962.5 (37.9°)	192.5	39	192.5
329	8810	LTP35 33/158 1024	948 (37.3°)	158	33	158
330	8820	40/250/1049	1000 (39.4°)	250	40	915

33	31 8	8830	AXBT-1 17/137.5	1100 (43.3°)	135.7	17	1142
33	32 8	3840	AXBT-2 34/207	1035 (40.74°)	207	34	1070
33	33 8	3850	BB900 37/150	900 (35.43°)	150	37	960
33	34 8	3860	45/338	1100 (43.3°)	338	44.5	338
33	35 8	3870	30/215	860 (33.85°)	215	30	908
33	36 8	3900	Extralit	719.5 (28.3°)	143.9	24.6	24.6
33	37 9	9000	McElroy Mesa Rib	914.4 (36°)	9"	18.6	9° 951.6 (37 ½°)
33	38 9	9100	KR-18	472 (18.6°)	472	64	525
33	39 9	9110	CyE Kr-18	472 (18.6°)	472	38	472 534 38
34	40 9	9200	T-100	990 (39°)	330	30	330
34	41 8	3820	40/250/1049	1000 (39.4°)	250	40	915

341	8830	AXBT-1 17/137.5	1100 (43.3°)	135.7	17	135.7
342	8840	AXBT-2 34/207	1035 (40.74°)	207	34	1070
343	8850	BB900 37/150	900 (35.43°)	150	37	960
344	8860	45/338	1100 (43.3°)	338	445	1114
345	8870	30/215	860 (33.85°)	215	30	908
346	8880	LG40 G5 (38.5/250)	1000 (39.37°)	250	38.5	250 1039 38.5
347	8890	Trimdek 30/190 R32	762 (30°)	191	31	191 823
348	8900	Extralit	719.5 (28.3°)	143.9	24.6	24.6
349	8910	MBS 35 (32/207)	1035 (40.74°)	207	32	1086
350	8920	Metform 32/250	1000 (39.37°)	250	32	250
351	8930	Euroform 34 4.271.34	1085 (42.71°)	271.25	34	271.25

352	8940	Dimond V-Rib 31/102/919	919 (36.18°)	102	31	970
353	8950	AXPLP-8 16/187	1124 (44.25°)	187	16	1169
354	8960	AXPLP-9 35/210	1050 (41.33°)	210	35	1080
355	8970	35/250/1041	1000 (3937)	250	35	250
356	8980	18/134.5/1098	1076 (42.36°)	135	18	135
357	8990	34/210	1050 (41.34°)	210	34	1092
358	9000	McElroy Mesa Rib	914.4 (36°)	9"	18.6	951.6 (37 1/2")
359	9010	LTP45 43/180	900 (35.43°)	180	43	990.9
360	9020	SSL Saflok 41/945	945 (37.2°)	314, 317	41	314 317 314 982
361	9030	45/180/1045	900 (35.43°)	180	45	180
362	9040	W-950 35/237.5	950 (37.4°)	237.5	35	237.5

363	9050	AR 330 33/200	1000 (39.37°)	200	33	1063
364	9060	28/205/902	820 (32.28°)	205	28	902
365	9070	PB45 (45/950)	950 (37.4°)	317,316	45	317 316 317 45
366	9080	TRB-45 43/150 972	900 (35.43°)	150	43	972.3
367	9090	CT 42/192	960 (37.8°)	192	42	192
368	9100	KR-18	472 (18.6°)	472	64	525
369	9110	CyE Kr-18	472 (18.6°)	472	38	472
370	9120	T25 18/170	1020 (40.16°)	170	18	170
371	9130	T40 36/196	472 (18.6°)	196	36	196
372	9140	Teczone Pare Panel	1197 (47.13°)	278.5	30.1	278.5 1227.5
373	9150	MultiTecho 45/910 R4	910 (35.82°)	230, 225	30	230 225 30

374	9160	Maracana 150			93	270
375	9200	T-100	990 (39°)	330	30	330
376	9300	Barnmaster	812.8 (32°)	203.2	11	862 (34")
377	9400	R-101	1008 (39.7°)	24.6	144	24.6
378	9500	250-40	1000 (39.4°)	250	40	1086
379	9600	U-Panel	914 (36°)	152.4	18.7	971 (38 7/22)
380	9700	Isolpack R/W 1000	1000 (39.4°)	250	40	1057.5
381	9800	TR-7	870 (34.3°)	144 145 146	38	910
382	9900	Hertje Lumber	471 (18.5°)	222.5 334.1 470.9	84.1	222.5 334.1 470.9
383	9910	PC Ridgelight		612.9 (24 1/a ²)	41.5	612.9 (24 Va*)
384	SunSky® 2.67	Sinus 67.8/22.25	814 (32°)	67.8	22.2	67.8 870 (341/4°)

385	SunSky [®] 7.2	Trapeze 183/38	1097 (43.2°)	183	1.5*	183 1217 (41.85°)
386	SunSky® 9	SunSky 9-a (March 2003)	914 (36°)	228.6	3/4"	228.6 38" (965)
387	SunSky* 12	Trapeze 12*/1 1/4*	914 (36°)	304.8	31.8	304.8 38"(965)
388	SunSky* Propanel	Trapeze 9"/5/8"	914 (36°)	228.6 (9°)	15.9 (0.63°)	228.6 (9°) 15.9 38° (970.9)
389	American 2.6*	Sinus 67.8/20	949 (37.4°)	67.B	20	1020 (40 ³ / ₂₂ ")
390	American 4.2*	Sinus 107/27	963 (37.9°)	107	27	1070 (42.1")
391	Astoria	Trapeze 305/35.8	915 (36°)	305	35.8	305 38 35.8 1033.3 (40 ¹¹ / ₁₆)
392	Spandek	Trapeze 87:5/24	700 (27.6°)	875	24	87.5 754
393	Trimdek	Trapeze 190/27	1140 (44.9°) 760 (29.9°)	190	27	190
394	Big 6	Sinus 146/48	1022 (40.2°)	146	48	1086
395	Iscorit	Trapeze 333.3/38	1000 (39.4°)	3333	38	3333

396	Kirin	Trapeze 250/41	1000 (39.4°)			1085
397	5,6 Wave	Sinus 177/50	708 (34.8°) 885 (34.8°) 1062(41.8°) 1062 (41.8°)			1100 (1115)
398	Greca 70	Trapeze 70/18	1050 (41.3°)			70 1095
399	Greca 75	Trapeze 75/19	900 (35.4")			990
400	Greca 76	Trapeze 76/18	1824 (71.8°) 1216 (47.9°) 1216 (47.9°) 1140 (44.9°) 1064 (41.9°) 1064 (41.9°) 988 (38.9°) 760 (29.9°) 608 (23.9°) 532 (20.9°)			76 810
401	Greca 78	Trapeze 78/21	936 (36.9°)	107	27	78 21
402	Omega	76/15	1824 (71.8°) 1824 (71.8°) 1824 (71.8°) 1216 (47.9°) 1216 (47.9°) 1216 (47.9°) 1064 (41.9°) 988 (38.9°) 836 (32.9°) 760 (29.9°)			76 810

403	Iron 76	Sinus 76/18	1216 (47.9°) 1064 (41.9°) 1064 (41.9°) 1064 (41.9°) 988 (38.9°) 988 (38.9°) 836 (32.9°) 836 (32.9°) 760 (29.9°) 608 (23.9°)	76	16	76 860
404	Sinus 130/30	Ethernit 5	910 (35.8°)	130	30	130
405	65/400	Pazdera 65/400	402 (15.8°)	100	43	402