


RIB CAP flashing for 3/4" Rib panel profile termination



Designed to waterproof end terminations of the popular "AG" 3/4" tall rib metal panel profile.

Sleeve flexibility to absorb vibration and movement caused by expansion/contraction while sealing out unwanted elements. Specifically molded for 3/4" tall rib profile metal. Available in standard Grey EPDM and black EPDM by special order.

- Superior sleeve flexibility and vibration resistant.
- Aluminum base ring for easy molding and fastener stability.
- 20 Year limited warranty and superior weatherability.

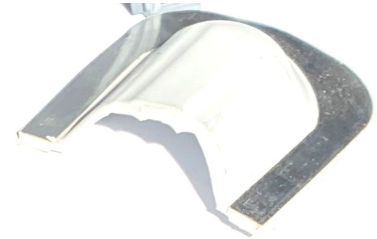

Specifications

Performance Temperature Range

Standard EPDM flashings -65 deg F to 212 deg F

Adv Ozone Resistance Testing: 70 hr @ 500pphm

3/4" overall height x inner wall width of 2" inner depth/length of 2-3/4"



100% Made in North America,



Buy American Plan Compliant.

Selection

GRAY EPDM

<u>Size Fits</u>	<u>Base</u>	<u>Qty/Box</u>	<u>Part#</u> / <u>Part#</u>
Mini 3/4" Rib	3.25" x 2.5"	10	DMRIBCAP/MC051GA

Installation

Ask for installation guide

MSDS: Based on current requirements of the occupational safety and health administration code, 26CFR, part 19101200 (Hazard communication), it has been determined that our pipe flashing products are considered "articles". A material safety data sheet is not required for items meeting the code definition of "article".

To find a distributor of DMI products please visit www.directmetalsinc.com or call 855-800-8878