


# ALUMINUM INSULVENT

One Way & Two Way

**FEATURES:**

- Provides pressure equalization in roof system
- Low cost, all-metal breather used for venting all types of insulation
- Spun from heavy gauge aluminum
- An extra wide base opening and security attached cap
- An optional foam insert is available to prevent moisture from condensing on the inside of the standpipe
- Simple & easy to install
- Unique cap design shields against entry of wind-blown rain or snow
- Flange may be coated with PVC or TPO.

**WARNING**  
 Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
**PVC Only**

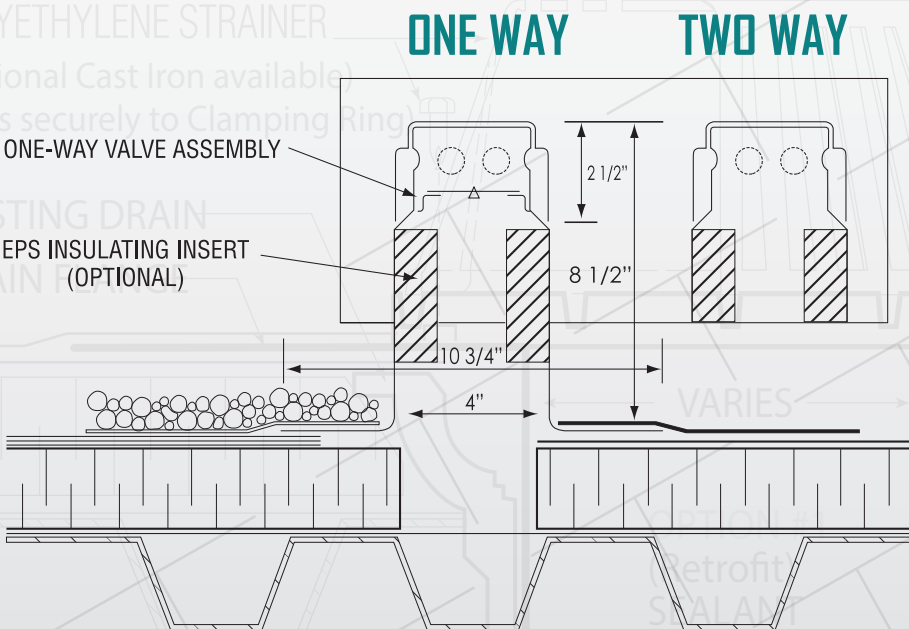

**One Way**  
 Exclusive one-way valve design prevents moisture from re-entering roofing system

**Two Way**  
 Allows for both exhaust and convective movement of air

**Note: Some vents are supplied with caps unattached for ease of installation.**

PRODUCT SPECIFICATIONS	OVERALL HEIGHT	BASE OPENING	BASE OPENING WITH INSULATION INSERT	FLANGE DIAMETER	FLANGE MATERIAL	RECOMMENDED SPACING
ALUMINUM INSULVENTS	8 1/2 IN.   216MM	4 IN.   102MM	3 IN.   76MM	10 3/4 IN.   273MM	ALUMINUM	1 PER 1000 SQ. FT.   93M <sup>2</sup>