

WELDABLE TPO GOOSE NECK VENT




Weldable TPO Goose Neck Vents, Bullet TPO GNV's

The Bullet Products solution for TPO flat roofing vent penetrations. This flashing is made with a 80mil white Polyolefin Elastomer (TPO) that can be heat welded to TPO roofing systems. Quick and easy installation with no sealants or clamps and no curbs needed. The aesthetically pleasing is oil resistant and features a removable pest screen, and damper.

Features & Benefits:

- Fast Installation, 80mil weldable base
- 100% UV protected flexible TPO base construction
- 35 Year Gooseneck Hood with large venting area with 8" above deck clearance.

Service Temp: -74 deg F to 190 deg F Environmental Resistance: Excellent resistance to Ozone, UV, water, alcohol, weak acids & chlorine.

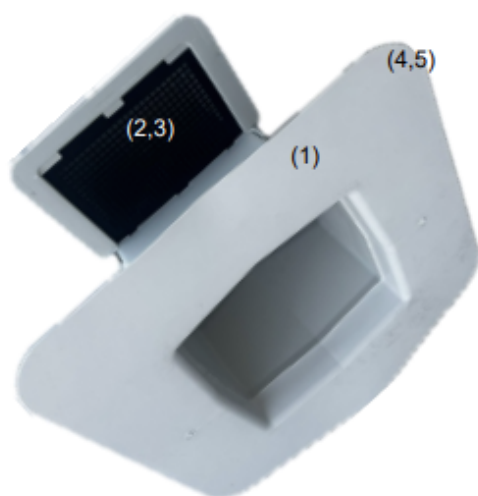

Dimensions

- (1) 9-1/2" x 10" throat opening
- (2) 7-1/2" x 4-1/2" with screen ventilation area
- (3) 8-1/2" x 6" ventilation opening with screen removed
- (4) 20" x 19" weldable TPO base
- (5) 4" weldable border TPO flange
- (6) 12-1/4" total height
- (7) 8" above deck screen height

Availability

Sizes	Qty/Box	Part#
10"	TBD	DMITPOGNVW10

There is no specific approval number or system manufactures warranty coverage on this item. Please check local building codes and roofing system manufacturers requirement prior to ordering.