



## 2.0mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE

2.0mm MEGA HD polycarbonate panel panels are designed for use in steel buildings where purlin spans can be up to 5' apart. These panels are also popular for canopies and patio coverings in pool areas and screen cage applications. Commercial Greenhouses, Home Greenhouses, Office Partitions, Vertical Glazing, Industrial Roofing, Pool Enclosures, Patio Covering, Window Replacement, Fiberglass Skylight Panel replacement, Metal Building Skylights, Domes, Shelters, Canopies, Sheds, Carports, Sunrooms, Sidelites.

DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels in 1.0mm, 1.5mm, and 2.0mm thick in many different corrugations.

Below you will find our quick ship panel options on 2.0mm thick commercial grade polycarbonate panels.

### 2.0mm Commercial Grade Panels

Profile/Color	Length	WHSE	Part#	Light Transmission
MR12 Silver	12'	1,2	DMPCMR12XHS12	20%
7.2 Corr Soft White	12'	2	DMP2.072MR12SW	78%

### Installation Accessories


Description	Length	Part#
PC to Steel SD Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8"	45'	DMBT3323845
Butyl*Roll Seam Tape 7/8"t 25'		DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C
Fall Guard Protection Scn	F-310	FGF310

### Important things to know:


1. All sales final - no returns
2. The above fasteners and accessories are required for approved installation and warranty validity.
3. It is suggested to register the warranty with DMI.
4. Shipping charges and packaging charges may be additional.
5. Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
6. All fastening points must be pre-drilled to allow for expansion and contraction of the product.
7. When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
8. Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.



MR12	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
2.0	38"	36"	12"	1.25"	

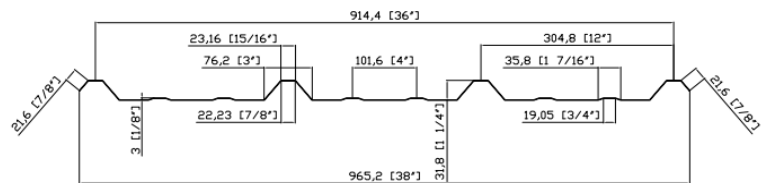

7.2 Corr	Overall Width	Net Coverage	Pitch /	Depth / RHeight	Available colors:
2.0	40.72"	36"	7.2"	1.5"	

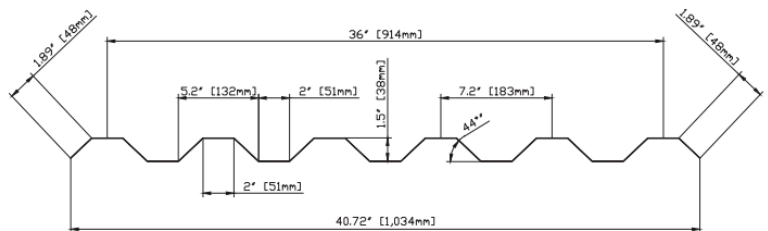

Available for purchase from DMI Distributor below

Installation instructions at [www.directmetalsinc.com](http://www.directmetalsinc.com)



# 1.5mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE


1.5mm MEGA HD polycarbonate panel panels are designed for use in steel buildings where purlin spans can be up to 5' apart. These panels are also popular for canopies and patio coverings in pool areas and screen cage applications. Commercial Greenhouses, Home Greenhouses, Office Partitions, Vertical Glazing, Industrial Roofing, Pool Enclosures, Patio Covering, Window Replacement, Fiberglass Skylight Panel replacement, Metal Building Skylights, Domes, Shelters, Canopies, Sheds, Carports, Sunrooms, Sidelites.

DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels in 1.0mm, 1.5mm, and 2.0mm thick in many different corrugations.


Below you will find our quick ship panel options on 1.5mm thick commercial grade polycarbonate panels.



MR12	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Clear, White
FL11238.2	38"	36"	12"	1.25"	



MR9	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Clear, White
3/4" RIB	38"	36"	9"	.75"	

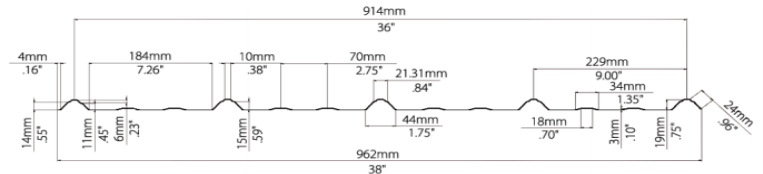


## 1.5mm MEGA HD Grade Panels

Profile/Color	Length	WHSE	Part#	Light Transmission
MR9 Clear	12'	2	DMPCMR9MC12	88%
MR9 White	12'	2	DMPCMR9MW12	43%
MR12 Clear FBC	12'	1	DMPR1MSCL12	88%
MR12 White FBC	12'	1	DMPR1MSWT12	43%
BR2 Soft White	12'	1	DMPRBR215SW12	78%
U/PBU White	12'	1	DMPRU12W1.5	43%


## Installation Accessories

Description	Length	Part#
PC to Steel SDFBC Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8"	45'	DMBT3323845
Butyl*Roll Seam Tape 7/8"t 25'		DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C
Fall Guard Protection Scn	F-310	FGF310

BR2	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: Soft White
Butler	39.8"	36"	12"	1.5"	

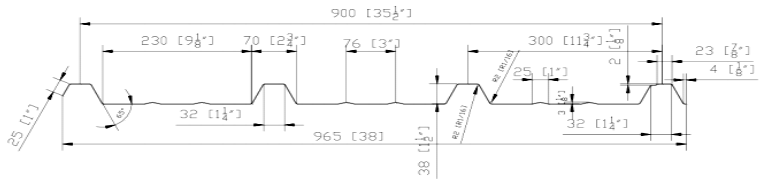

PBU	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors: White
	38.25"	36"	6"	0.75"	



## Important things to know:

1. All sales final - no returns
2. The above fasteners and accessories are required for approved installation and warranty validity.
3. It is suggested to register the warranty with DMI.
4. Shipping charges and packaging charges may be additional.
5. Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
6. All fastening points must be pre-drilled to allow for expansion and contraction of the product.
7. When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
8. Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.

Available for purchase from DMI Distributor below

Installation instructions at [www.directmetalsinc.com](http://www.directmetalsinc.com)



DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels in 1.0mm, 1.5mm, and 2.0mm thick.


Below you will find our quick ship panel options on 1.0mm thick commercial grade polycarbonate panels. Made in the USA, in stock and ready to ship from a DMI Service Center.

## 1.0mm Commercial Grade Panels

Profile/Color	Length	WHSE	Part#	Light Transmission
MR9 Clear	12'	1,2	DMP341MSCL12	90%
MR9 White	12'	1,2	DMP341MSWT12	45%
MR12 Clear FBC	12'	1,2	DMPR1MSCL12	90%
MR12 White FBC	12'	1,2	DMPR1MSWT12	45%
MR12 Bronze	12'	1	DMPR1MSG12	35%
5V White	12'	1	DMP51M5VWT12	45%
2.67 SP Clear	12'	1	DMP10925312C	90%
2.67 SP White	12'	1	DMP10924912W	90%
7270Clear	12'	Call	DMIPC727012C	90%

## Installation Accessories

Description	Length	Part#
PC to Steel SDFBC Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9SWSN7/32
Butyl*Roll Seam Tape 3/8" 45'		DMBT3323845
Butyl*Roll Seam Tape 7/8"t 25'		DMBT31678M
Translucent Sealant Tube 300ml		DMSM5731C

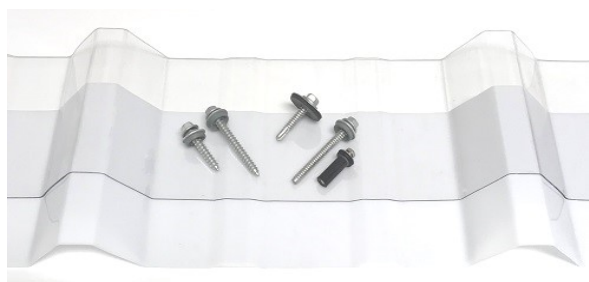


### Important things to know:

1. All sales final - no returns
2. The above fasteners and accessories are required for approved installation and warranty validity.
3. It is suggested to register the warranty with DMI.
4. Shipping charges and packaging charges may be additional.
5. Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
6. All fastening points must be pre-drilled to allow for expansion and contraction of the product.
7. When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
8. Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.


**Find installation instructions at**  
[www.directmetalsinc.com](http://www.directmetalsinc.com)

## 1.0mm CORRUGATED POLYCARBONATE PROFILE SELECTION GUIDE


MR12	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
FL11238.1					Clear, White, Bronze
FBC,TDI	38"	36"	12"	1.25"	

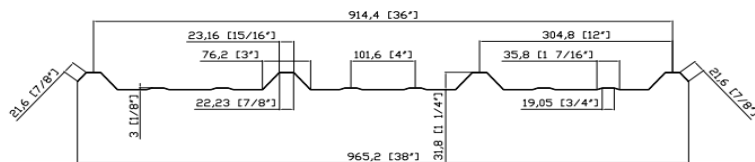


MR9	Overall Width	Net Coverage	Pitch /	Depth / RHeight	Available colors:
					Clear, White
	38"	36"	9"	.75"	

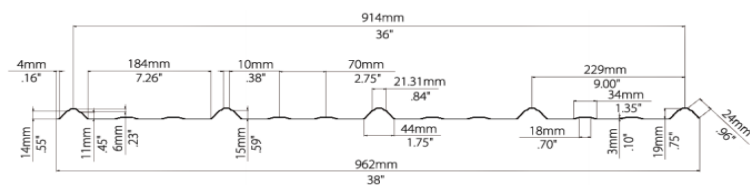


5V	Overall Width	Net Coverage	Pitch /	Depth /	Available colors:
					White
	26"	24"	12"	0.5"	

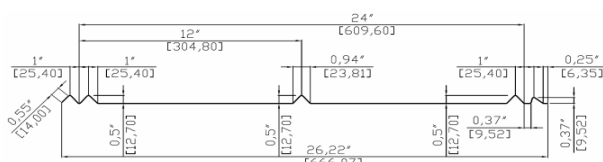


2.67 SP	Overall Width	Net Coverage	Pitch /	Depth /	Available colors:
					Clear, White
	34.25"	32"	2.67"	7/8"	

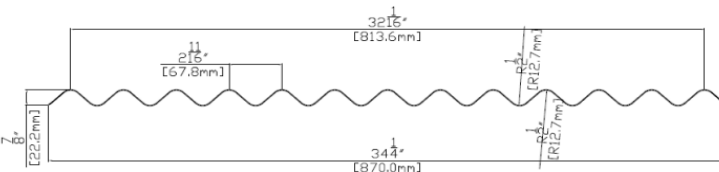

DMIPC 7270	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Special Order with Minimums:
Special	39.8"	36"	12"	1.5"	Clear, White, Soft White, Bronze, Silver

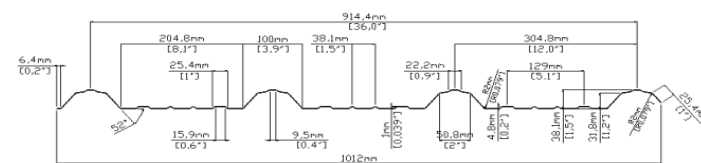

**Available for purchase from DMI Distributor below**





DMI has the flexibility to offer many choices in daylighting options including corrugated polycarbonate panels including 0.8mm 1.0mm, 1.5mm, and 2.0mm thick.

Below you will find our quick ship panel options on 0.8mm thick polycarbonate panels. Made in the USA, in stock and ready to ship from a DMI Service Center.

### 0.8mm Economy Grade Panels

Profile/Color	Length	WHSE	Part#	Light Transmission
MR12 White	12'	1	DMPR08MSWT12	45%
MR9 Clear 8', 10', 12', 24'		2	DMPR.8MSCL9(L)	90%
MR9 White 8', 10', 12'		2	DMPR.8MSWT9(L)	45%
PBU Clear	12'	1	DMPRU12C.8	90%
Mini Corr Clear	12'	2	DMIP140617	90%

Suntuf available by special order and ships from warehouse 7 in PA. Suntuf is packaged and sold in 10 piece bundles.

### Installation Accessories

Description	Length	Part#
PC to Steel SDFBC Screw	1-1/4"	DMIPOSD14150W114
PC to Steel SS Screw	1-1/2"	DMIREPL14150SSB
PC to Steel SS Screw	2-1/2"	DMIREPL14250SSB
PC to Wood SS Screw	1-1/2"	DMIREPL14150SSA
PC to Wood SS Screw	2-1/2"	DMIREPL14250SSA
PC Lap Stitch Grommet	1"	DMI210F100NWESN
PC <1" Rib Stitch Screw	3/4"	DMIREPL14034SSA
PC Pre-drill Drill Bit 3/8"	4"	DMI9DB384
Purlin Drill Bit 7/32"	2-1/2"	DMI9WSN7/32
Butyl*Roll Seam Tape 3/8"	45'	DMBT3323845
Butyl*Roll Seam Tape 7/8"t 25'		DMBT31678M
Translucent Sealant Tube	300ml	DMSM5731C




### Important things to know:


- All sales final - no returns
- The above fasteners and accessories are required for approved installation and warranty validity.
- It is suggested to register the warranty with DMI.
- Shipping charges and packaging charges may be additional.
- Custom panel profiles and custom lengths are available by special request, expect order minimums and required deposits.
- All fastening points must be pre-drilled to allow for expansion and contraction of the product.
- When dropped in between two metal panels as a skylight application, white is the suggested color choice for quality of light.
- Polycarbonate is sensitive to some chemicals in popular sealants and caulking. Consult our approved sealant list before putting polycarbonate in contact with any sealant.

## 0.8mm CORRUGATED POLYCARBONATE ECONOMY PROFILE SELECTION GUIDE


MR12	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
	38"	36"	12"	1.25"	White

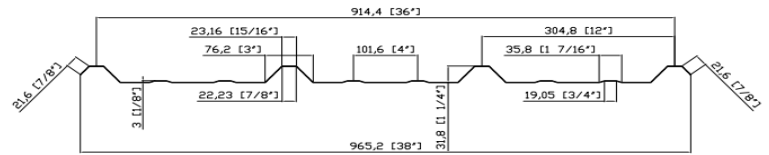


MR9	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
	38"	36"	9"	.75"	Clear, White

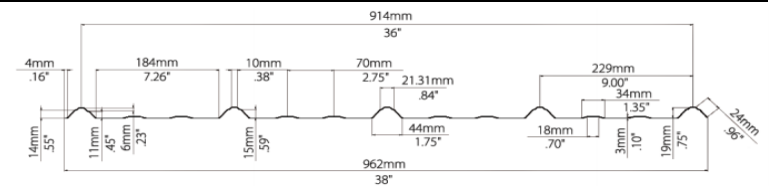

PBU	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
	38.25"	36"	6"	0.75"	Clear



Mini Corr	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Special Order with Minimums:
Special Order	26"	25"	1.26"	0.35"	Clear, White



Suntuf	Overall Width	Net Coverage	Pitch / On Center	Depth / RHeight	Available colors:
Special order	26"	24"	3.0"	5/8"	Clear, White, Solar



### Suntuf Accessories

The following accessories are available for use in your Suntuf installation. Note these accessories are made for use with the Suntuf profile panels and may not be compatible for use with other DMI polycarbonate products.

- Suntuf Ridge Cap Flashings ( 4'2" L x 12" W )
- Suntuf Side Ridge flashing ( 4'2" L x 7" W )
- Suntuf Wall Connector Flashing ( 4'2" L x 8" W )
- Suntuf Vertical Closure Strip, plastic ( 7/8" H x 1 3/16" W x 24" L )
- Suntuf Horizontal Closure Strip, available in plastic ( 3/4" H x 7/8" W x 24" L )



Find installation instructions at [www.directmetalsinc.com](http://www.directmetalsinc.com)